
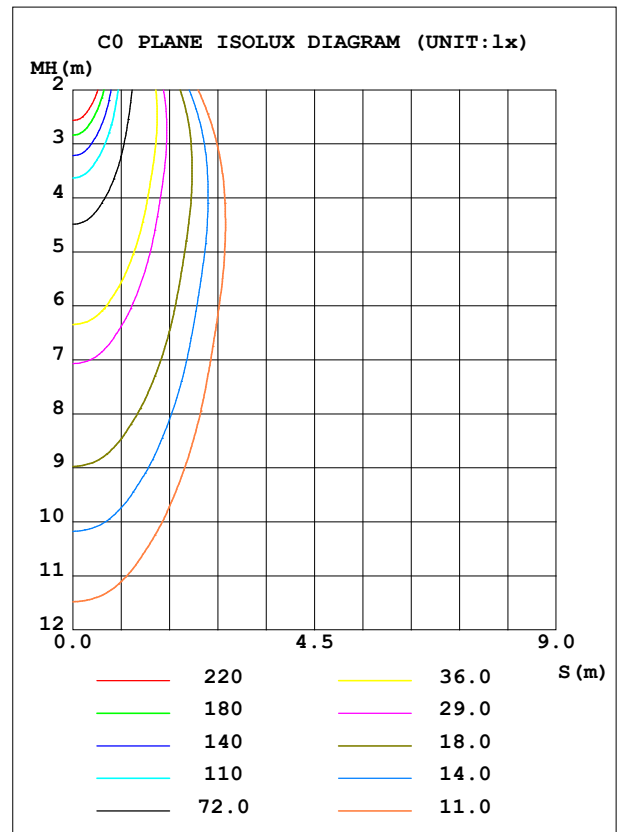


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:119.74V I:0.1170A P:13.825W PF:0.9865 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1178.62x1 lm		
NAME: FR-LED-6-S15W-5CCT-FG-WH	TYPE:	WEIGHT:
SPEC.: 2700K 90	DIM.:	SERIAL No.:
MFR.: LTS	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL		Imax (cd)	1423	S/MH (C0/180)	0.62
NOMINAL POWER (W)	15	LOR (%)	100.0	S/MH (C90/270)	0.64
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	1178.6	η UP, DN (C0-180)	0.0,48.7
NOMINAL FLUX (lm)	1178.62	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0,51.3
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.75
TEST VOLTAGE (V)	120	η down (%)	100.0	CIBSE SHR MAX	0.75

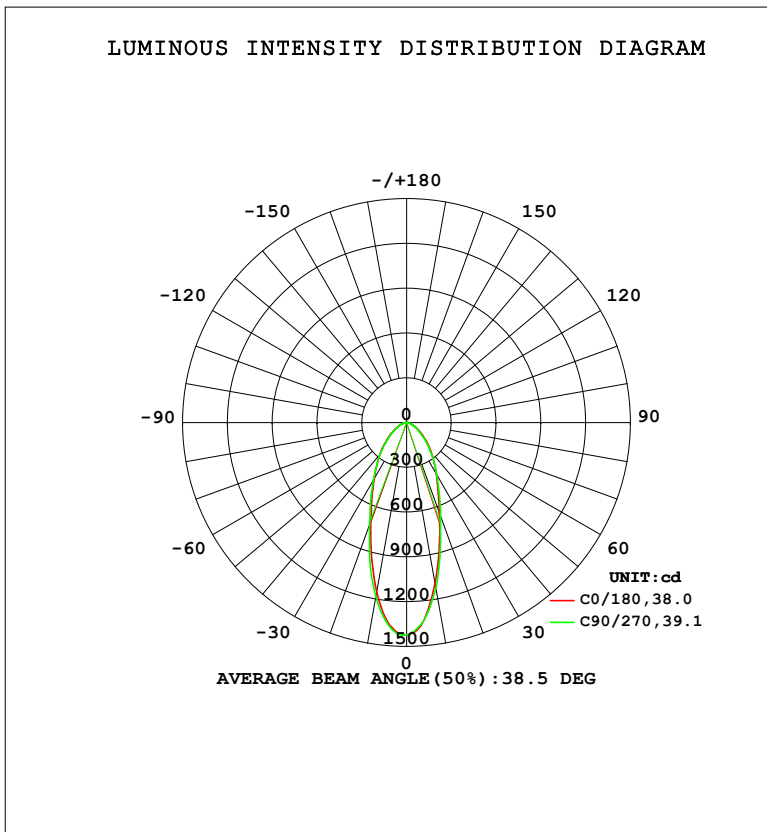

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators:
 Test Date: 2022-12-19

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.090m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	1097	1074	1127	1177	1153	1168	1186	1126	0- 10	121.5	121.5	10.3,10.3
20	644.3	630.1	666.9	719.1	701.8	715.1	727.1	688.3	10- 20	249.3	370.8	31.5,31.5
30	399.8	390.4	405.2	434.0	437.1	449.2	447.4	418.8	20- 30	246.9	617.7	52.4,52.4
40	256.9	248.0	246.5	263.5	280.0	289.4	275.7	259.4	30- 40	210.9	828.6	70.3,70.3
50	151.1	145.1	138.3	148.6	166.1	172.8	157.3	147.7	40- 50	158.1	986.7	83.7,83.7
60	81.46	78.17	73.78	79.53	89.68	93.02	83.27	78.73	50- 60	102.3	1089	92.4,92.4
70	38.49	36.46	35.50	39.29	43.72	45.26	41.18	38.20	60- 70	58.85	1148	97.4,97.4
80	11.90	7.512	7.519	13.53	15.09	14.66	13.88	12.39	70- 80	26.42	1174	99.6,99.6
90	0.2109	0.1960	0.1902	0.1974	0.1310	0.1261	0.1248	0.1379	80- 90	4.311	1179	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-12-19

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:119.74V I:0.1170A P:13.825W PF:0.9865 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1178.62x1 lm		
NAME: FR-LED-6-S15W-5CCT-FG-WH	TYPE:	WEIGHT:
SPEC.: 2700K 90	DIM.:	SERIAL No.:
MFR.: LTS	SUR.:	Shielding Angle:

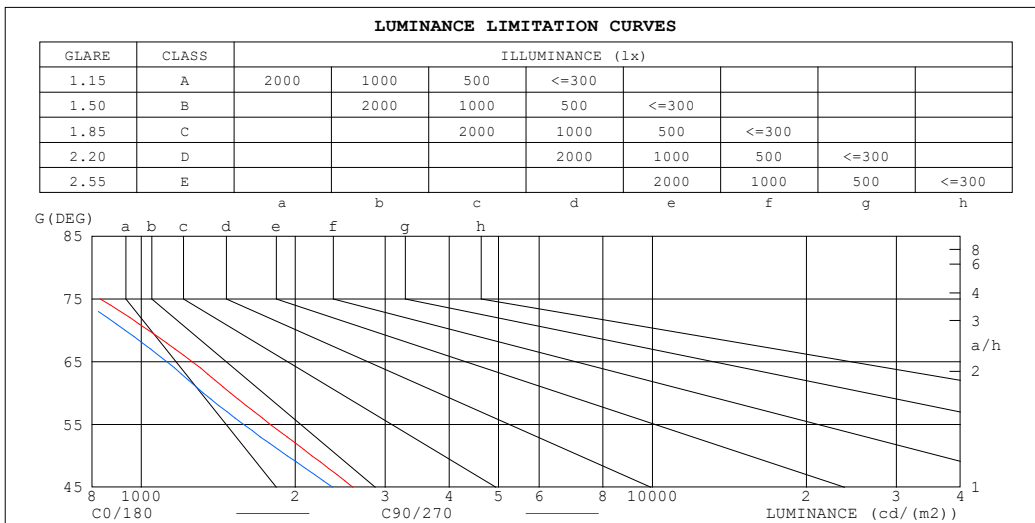

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	319	30
80	629	388
75	831	725
70	1033	930
65	1257	1122
60	1495	1323
55	1786	1585
50	2157	1929
45	2592	2367


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators:
 Test Date: 2022-12-19

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.090m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.74V I:0.1170A P:13.825W PF:0.9865 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1178.62x1 lm		
NAME: FR-LED-6-S15W-5CCT-FG-WH	TYPE:	WEIGHT:
SPEC.: 2700K 90	DIM.:	SERIAL No.:
MFR.: LTS	SUR.:	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.08	1.05	1.02	1.06	1.03	1.01	1.02	.90	.98	.98	.96	.95	.95	.93	.92	.90
2.0	.98	.93	.89	.97	.92	.88	.93	.89	.86	.90	.87	.84	.87	.85	.82	.81
3.0	.90	.84	.79	.88	.83	.78	.86	.81	.77	.83	.79	.76	.81	.77	.74	.73
4.0	.82	.76	.70	.81	.75	.70	.79	.73	.69	.77	.72	.68	.75	.71	.67	.66
5.0	.76	.69	.64	.75	.68	.63	.73	.67	.63	.71	.66	.62	.70	.65	.62	.60
6.0	.70	.63	.58	.70	.63	.58	.68	.62	.58	.66	.61	.57	.65	.60	.57	.55
7.0	.65	.58	.53	.65	.58	.53	.63	.57	.53	.62	.57	.53	.61	.56	.52	.51
8.0	.61	.54	.50	.61	.54	.49	.59	.53	.49	.58	.53	.49	.57	.52	.49	.47
9.0	.57	.51	.46	.57	.50	.46	.56	.50	.46	.55	.49	.46	.54	.49	.45	.44
10.0	.54	.47	.43	.54	.47	.43	.53	.47	.43	.52	.47	.43	.51	.46	.43	.41

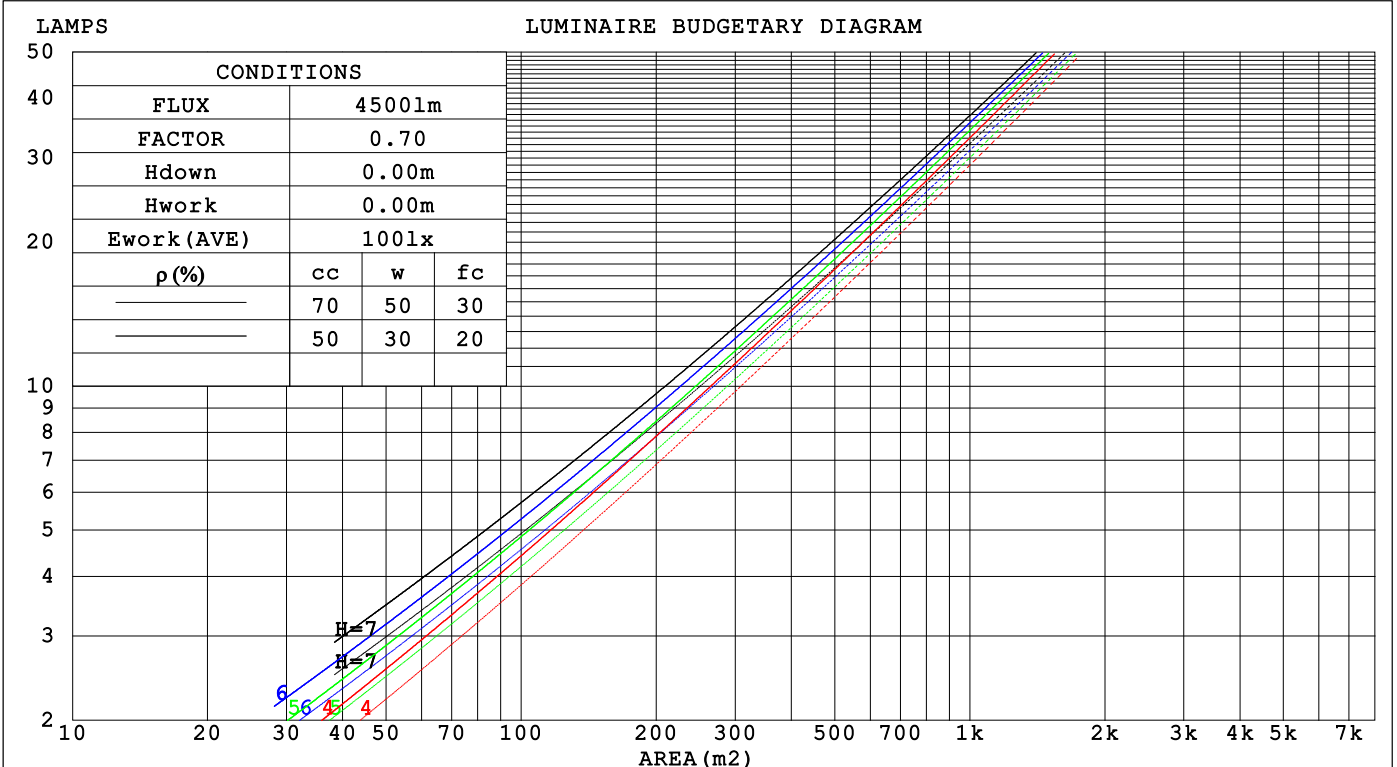

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-12-19

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:119.74V I:0.1170A P:13.825W PF:0.9865 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1178.62x1 lm		
NAME: FR-LED-6-S15W-5CCT-FG-WH	TYPE:	WEIGHT:
SPEC.: 2700K 90	DIM.:	SERIAL No.:
MFR.: LTS	SUR.:	Shielding Angle:

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.224	.127	.040	.217	.124	.039	.204	.117	.037	.192	.111	.036	.181	.105	.034	
2.0	.215	.118	.036	.209	.115	.035	.198	.110	.034	.188	.105	.033	.178	.101	.032	
3.0	.203	.108	.032	.198	.106	.032	.188	.102	.031	.179	.098	.030	.171	.095	.029	
4.0	.191	.099	.029	.186	.098	.029	.178	.094	.028	.170	.091	.028	.163	.089	.027	
5.0	.179	.091	.026	.175	.090	.026	.168	.088	.026	.161	.085	.025	.155	.083	.025	
6.0	.169	.085	.024	.165	.084	.024	.159	.081	.024	.153	.079	.023	.147	.078	.023	
7.0	.159	.079	.022	.156	.078	.022	.150	.076	.022	.145	.074	.022	.140	.073	.021	
8.0	.151	.074	.021	.148	.073	.021	.143	.071	.020	.138	.070	.020	.133	.068	.020	
9.0	.143	.069	.019	.140	.068	.019	.136	.067	.019	.131	.066	.019	.127	.065	.019	
10.0	.135	.065	.018	.133	.064	.018	.129	.063	.018	.125	.062	.018	.121	.061	.018	

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.174	.157	.141	.149	.135	.122	.102	.093	.084	.059	.054	.049	.019	.017	.016	
2.0	.162	.132	.107	.139	.114	.093	.095	.079	.065	.055	.046	.038	.018	.015	.012	
3.0	.152	.114	.084	.130	.098	.073	.089	.068	.051	.052	.040	.030	.017	.013	.010	
4.0	.142	.100	.067	.122	.086	.058	.084	.060	.041	.049	.035	.024	.016	.011	.008	
5.0	.134	.089	.055	.115	.077	.048	.079	.054	.034	.046	.031	.020	.015	.010	.007	
6.0	.127	.080	.046	.109	.069	.040	.075	.048	.028	.044	.028	.017	.014	.009	.006	
7.0	.120	.072	.039	.104	.063	.034	.072	.044	.024	.042	.026	.014	.013	.008	.005	
8.0	.114	.066	.033	.099	.057	.029	.068	.040	.021	.040	.024	.012	.013	.008	.004	
9.0	.109	.061	.029	.094	.053	.025	.065	.037	.018	.038	.022	.011	.012	.007	.004	
10.0	.104	.057	.025	.090	.049	.022	.062	.035	.016	.036	.021	.009	.012	.007	.003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-12-19

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:119.74V I:0.1170A P:13.825W PF:0.9865 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1178.62x1 lm		
NAME: FR-LED-6-S15W-5CCT-FG-WH	TYPE:	WEIGHT:
SPEC.: 2700K 90	DIM.:	SERIAL No.:
MFR.: LTS	SUR.:	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2

Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	12.7	13.9	12.9	14.0	14.2	12.2	13.4	12.5	13.6	13.7
3H	13.3	14.4	13.6	14.6	14.8	12.8	13.9	13.1	14.1	14.3
4H	13.5	14.5	13.8	14.8	15.0	13.0	14.0	13.3	14.3	14.5
6H	13.6	14.6	13.9	14.8	15.1	13.0	14.0	13.3	14.2	14.5
8H	13.6	14.5	13.9	14.8	15.1	13.0	13.9	13.3	14.2	14.4
12H	13.6	14.5	13.9	14.7	15.0	12.9	13.8	13.3	14.1	14.4
4H 2H	12.9	13.9	13.2	14.2	14.4	12.5	13.5	12.8	13.8	14.0
3H	13.7	14.6	14.0	14.9	15.2	13.3	14.1	13.6	14.4	14.7
4H	14.0	14.8	14.3	15.1	15.4	13.5	14.3	13.9	14.6	14.9
6H	14.1	14.9	14.5	15.2	15.5	13.6	14.3	14.0	14.6	15.0
8H	14.2	14.8	14.6	15.2	15.5	13.5	14.2	13.9	14.6	14.9
12H	14.1	14.7	14.6	15.1	15.5	13.5	14.1	13.9	14.5	14.9
8H 4H	14.0	14.7	14.4	15.0	15.4	13.6	14.2	14.0	14.6	14.9
6H	14.2	14.8	14.6	15.2	15.6	13.6	14.2	14.1	14.6	15.0
8H	14.2	14.7	14.7	15.1	15.6	13.6	14.1	14.1	14.5	15.0
12H	14.2	14.6	14.7	15.1	15.6	13.6	14.0	14.0	14.4	14.9
12H 4H	14.0	14.6	14.4	14.9	15.3	13.5	14.1	13.9	14.5	14.9
6H	14.2	14.7	14.6	15.1	15.5	13.6	14.1	14.1	14.5	15.0
8H	14.2	14.6	14.7	15.1	15.5	13.6	14.0	14.1	14.4	14.9

Variations with the observer position at spacings(CIE Pub.117):		
S = 1.0H	+ 0.5 / - 0.8	+ 0.6 / - 0.9
1.5H	+ 0.4 / - 0.4	+ 0.5 / - 0.6
2.0H	+ 1.2 / - 1.0	+ 1.3 / - 1.1

CIE Pub.117, 1179 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 0.6)
 Area: 0.111111 m2

C Range: 0 - 360DEG	γ Range: 0 - 90DEG
C Interval: 22.5DEG	γ Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
Temperature:25.3°C	Humidity:65.0%
Operators:	Test Distance:3.090m [K=1.0000]
Test Date:2022-12-19	Remarks:

UTILIZATION FACTORS TABLE

Test:U:119.74V I:0.1170A P:13.825W PF:0.9865 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1178.62x1 lm		
NAME: FR-LED-6-S15W-5CCT-FG-WH	TYPE:	WEIGHT:
SPEC.: 2700K 90	DIM.:	SERIAL No.:
MFR.: LTS	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	73	64	59	72	64	59	71	63	58	53
0.80	82	73	68	81	73	68	80	72	67	62
1.00	89	81	75	88	80	75	86	81	75	69
1.25	94	87	82	93	86	81	91	85	81	75
1.50	98	91	86	97	90	86	94	89	85	79
2.00	103	97	92	101	96	92	98	94	90	84
2.50	106	100	96	104	99	95	100	96	93	86
3.00	108	103	99	106	102	98	102	99	96	89
4.00	111	107	103	108	105	102	105	102	99	92
5.00	112	109	106	110	107	105	106	104	102	93
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-12-19

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:119.74V I:0.1170A P:13.825W PF:0.9865 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1178.62x1 lm		
NAME: FR-LED-6-S15W-5CCT-FG-WH	TYPE:	WEIGHT:
SPEC.: 2700K 90	DIM.:	SERIAL No.:
MFR.: LTS	SUR.:	Shielding Angle:

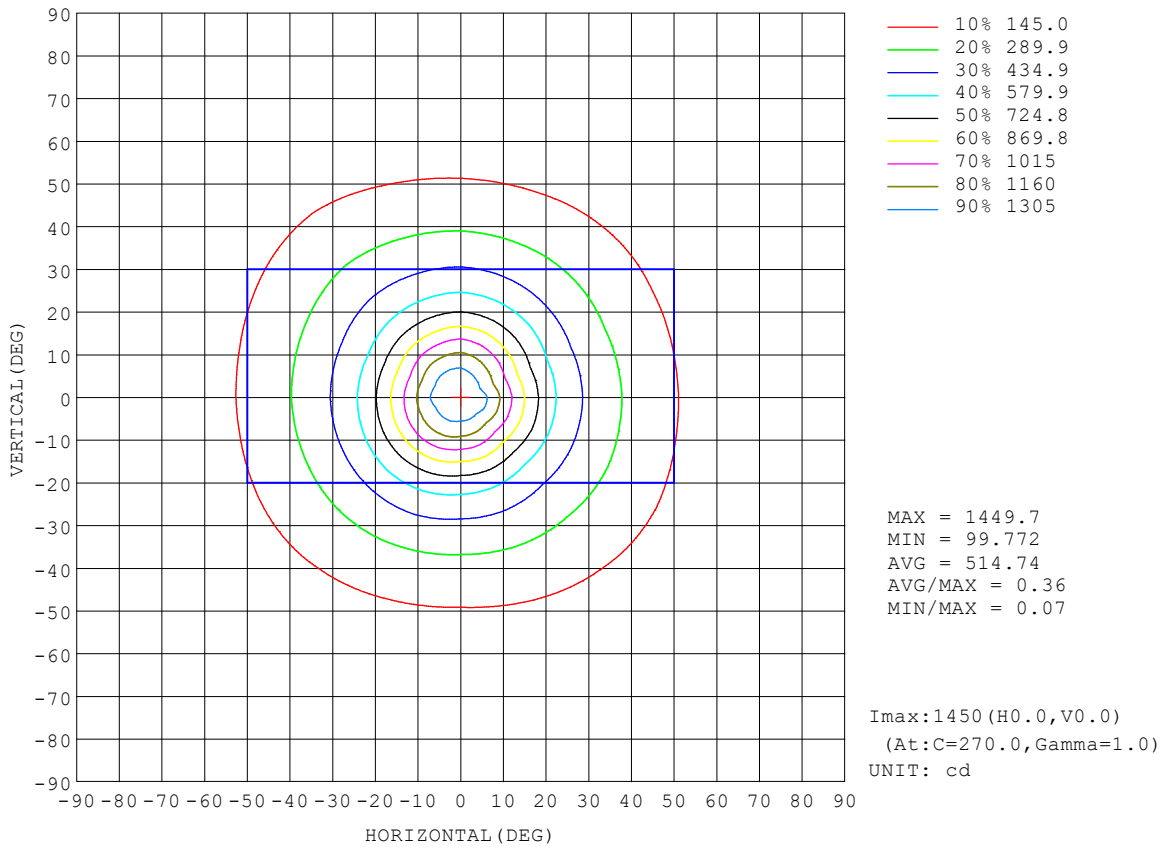


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-12-19

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

AAI Figure

Test:U:119.74V I:0.1170A P:13.825W PF:0.9865 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1178.62x1 lm		
NAME: FR-LED-6-S15W-5CCT-FG-WH	TYPE:	WEIGHT:
SPEC.: 2700K 90	DIM.:	SERIAL No.:
MFR.: LTS	SUR.:	Shielding Angle:

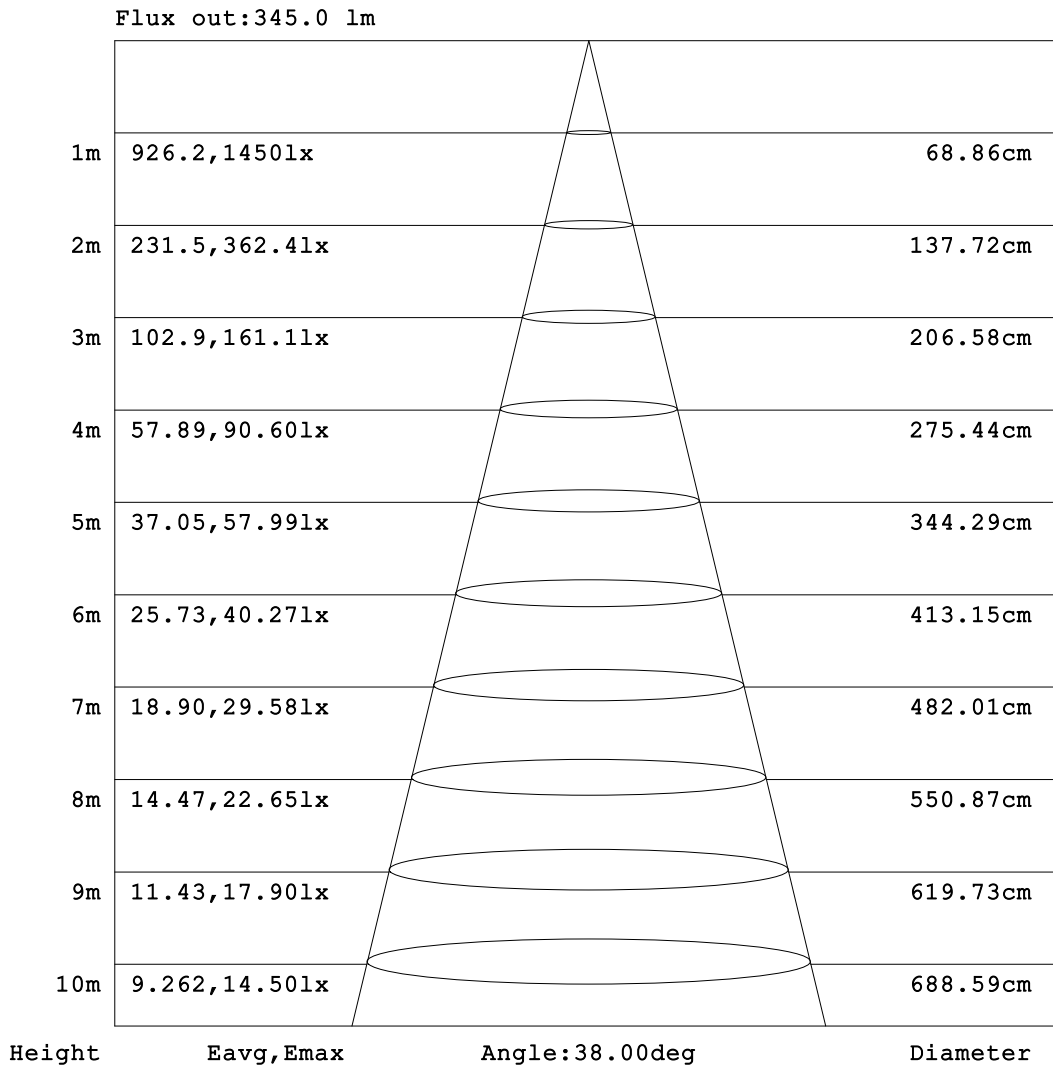


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators:
 Test Date: 2022-12-19

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.090m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:119.74V I:0.1170A P:13.825W PF:0.9865 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1178.62x1 lm		
NAME: FR-LED-6-S15W-5CCT-FG-WH	TYPE:	WEIGHT:
SPEC.: 2700K 90	DIM.:	SERIAL No.:
MFR.: LTS	SUR.:	Shielding Angle:

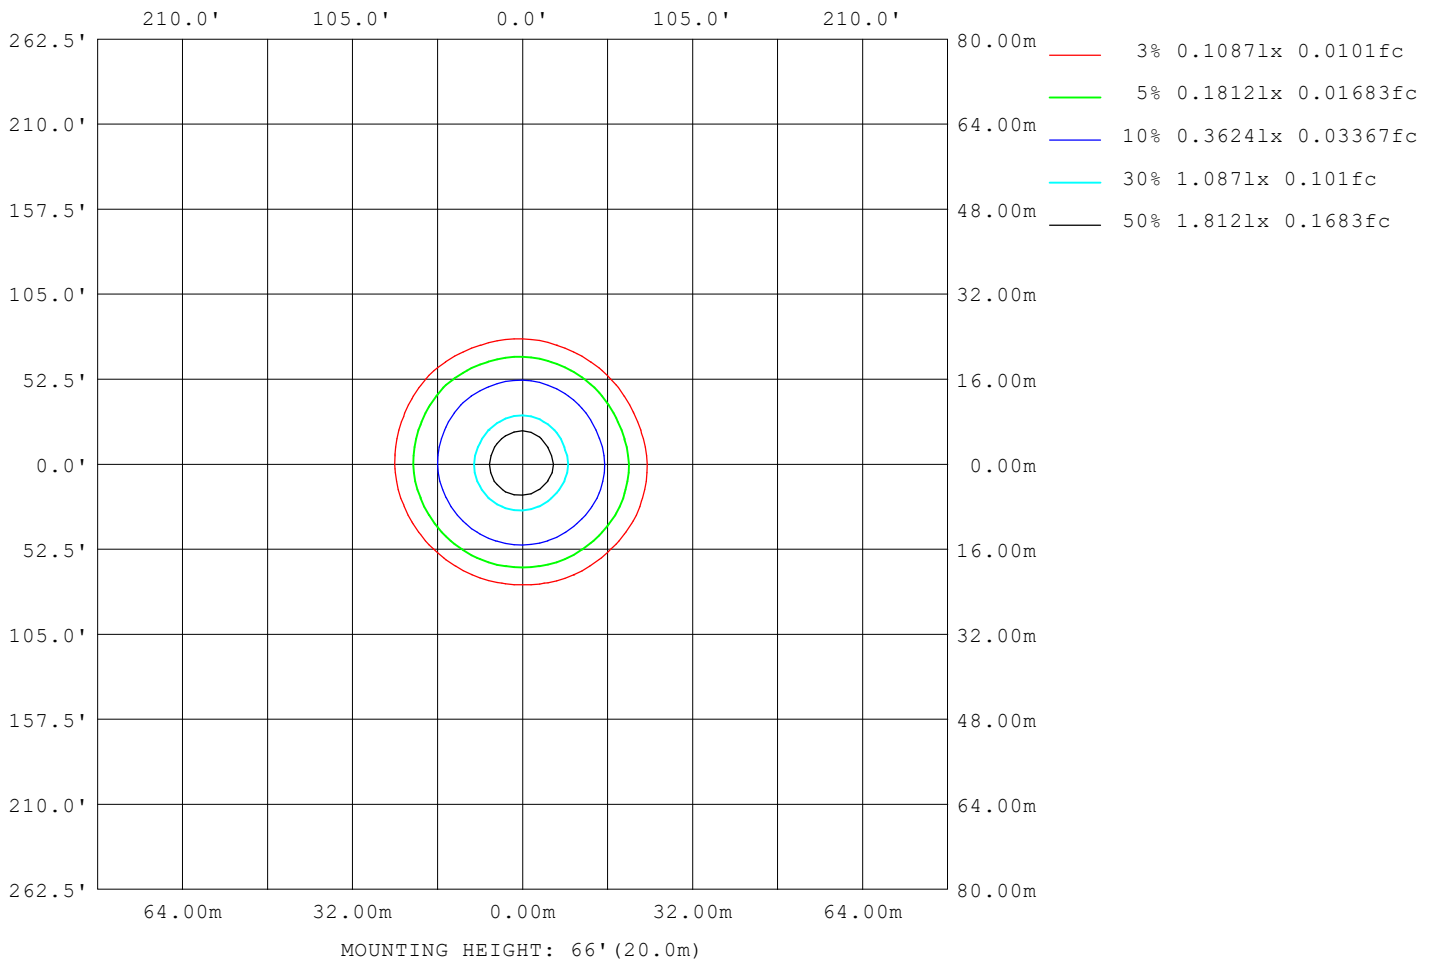

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-12-19

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:119.74V I:0.1170A P:13.825W PF:0.9865 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1178.62x1 lm		
NAME: FR-LED-6-S15W-5CCT-FG-WH	TYPE:	WEIGHT:
SPEC.: 2700K 90	DIM.:	SERIAL No.:
MFR.: LTS	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	1301
L_0~180 (75) av	889
L_0~180 (85) av	420
L_90~270 (65) av	1202
L_90~270 (75) av	816
L_90~270 (85) av	153
L_45 (65) av	1254
L_45 (75) av	857
L_45 (85) av	281

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:
 Test Date:2022-12-19

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

Planar Illuminance Curve

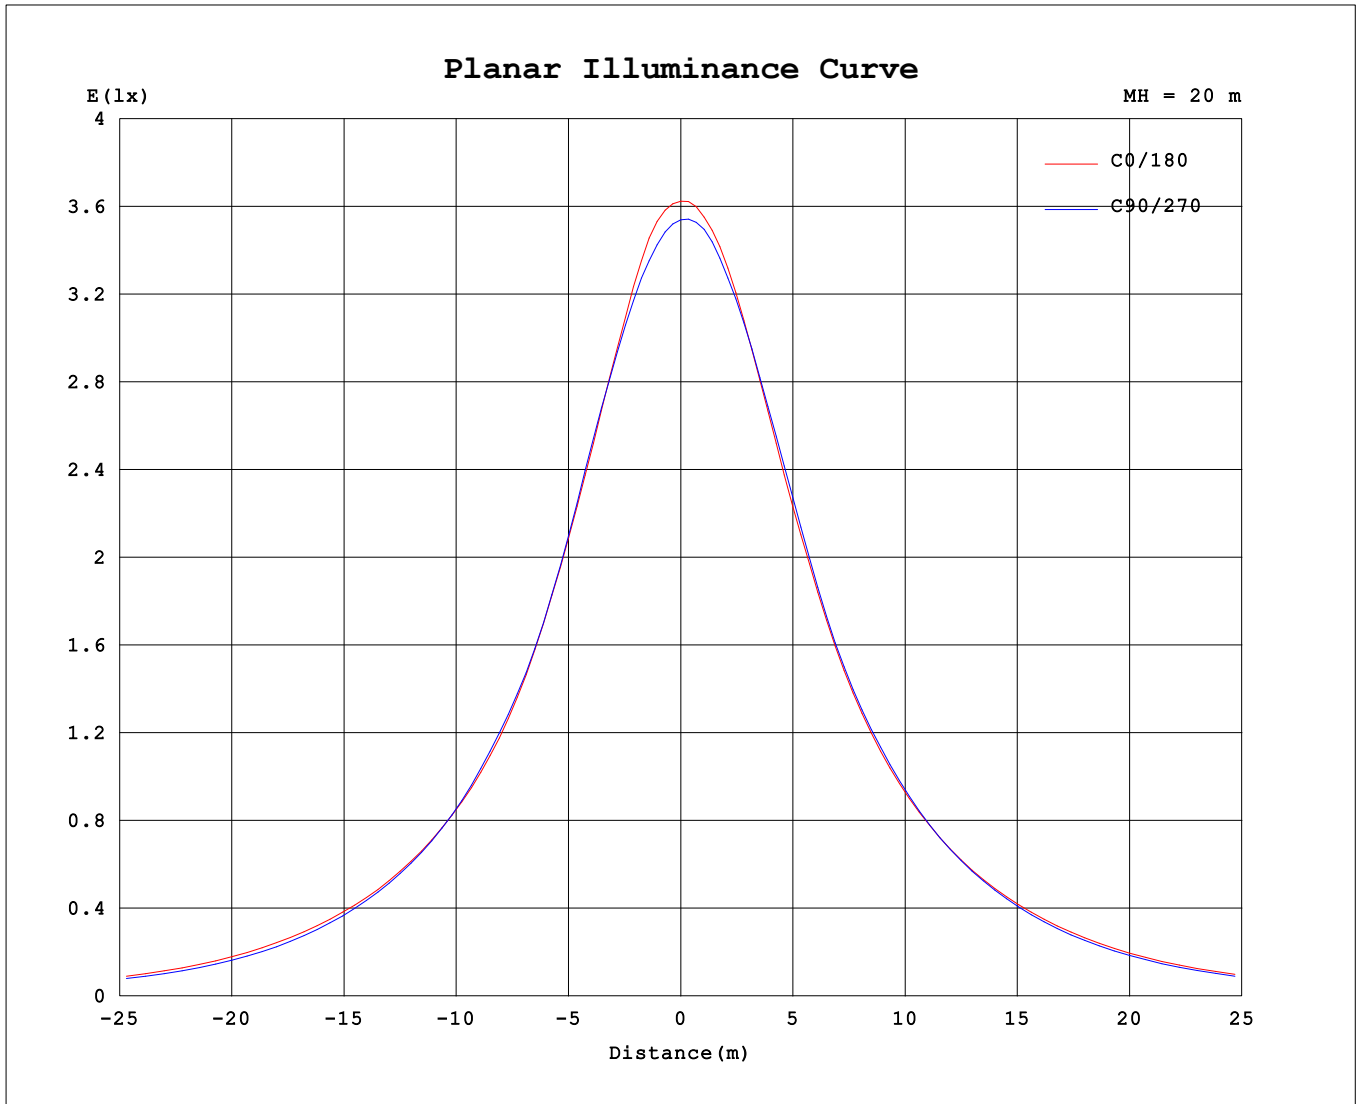

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators:
 Test Date: 2022-12-19

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.090m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.74V I:0.1170A P:13.825W PF:0.9865 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1178.62x1 lm		
NAME: FR-LED-6-S15W-5CCT-FG-WH	TYPE:	WEIGHT:
SPEC.: 2700K 90	DIM.:	SERIAL No.:
MFR.: LTS	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)		0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	1422	1422	1422	1422	1422	1422	1422	1422	1422	1422	1422	1422	1422	1422	1422	1422	1422			
5	1330	1338	1311	1324	1330	1347	1357	1364	1356	1347	1365	1364	1366	1352	1336	1321				
10	1097	1097	1074	1108	1127	1158	1177	1182	1153	1140	1168	1174	1186	1161	1126	1093				
15	852	856	838	866	875	916	940	950	916	902	931	936	953	928	892	849				
20	644	646	630	654	667	697	719	728	702	695	715	719	727	712	688	650				
25	501	497	489	507	519	545	558	564	548	541	557	563	570	555	534	510				
30	400	398	390	400	405	424	434	443	437	437	449	446	447	434	419	406				
35	321	321	313	317	319	330	341	351	350	352	362	353	354	341	332	323				
40	257	258	248	249	247	255	264	275	280	282	289	279	276	266	259	255				
45	200	202	192	190	187	192	200	212	218	221	226	216	211	203	198	196				
50	151	153	145	143	138	142	149	160	166	169	173	162	157	150	148	148				
55	112	114	108	105	101	104	109	119	123	125	128	120	115	110	108	109				
60	81.5	83.0	78.2	76.6	73.8	75.7	79.5	86.5	89.7	91.0	93.0	87.1	83.3	79.3	78.7	79.3				
65	57.9	58.5	55.1	54.6	52.9	54.6	57.5	62.5	64.3	64.8	66.3	62.4	60.0	57.2	56.6	56.6				
70	38.5	38.9	36.5	36.5	35.5	37.1	39.3	42.9	43.7	43.8	45.3	42.5	41.2	39.0	38.2	37.7				
75	23.4	23.7	21.6	21.5	20.9	23.3	24.8	27.4	27.7	27.4	28.5	26.7	26.0	24.4	23.7	23.0				
80	11.9	11.1	7.51	7.23	7.52	10.8	13.5	15.2	15.1	14.7	14.7	13.6	13.9	13.2	12.4	11.7				
85	3.03	1.68	0.33	0.27	0.30	1.58	4.15	5.54	5.10	3.22	2.75	2.19	2.67	3.11	3.65	3.19				
90	0.21	0.20	0.20	0.20	0.19	0.19	0.20	0.42	0.13	0.13	0.13	0.13	0.12	0.13	0.14	0.15				

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:
Test Date:2022-12-19

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks: