
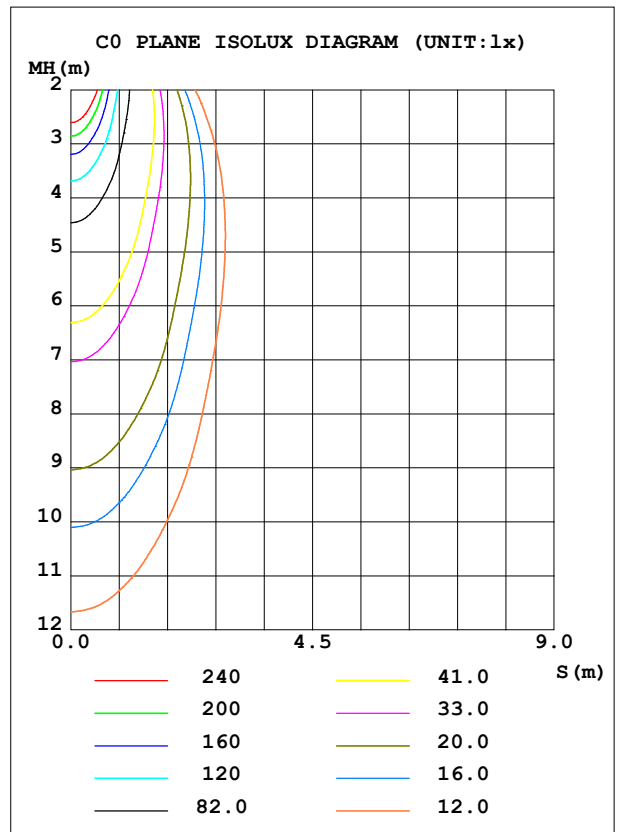


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:119.74V I:0.1110A P:13.103W PF:0.9858 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1347.3x1 lm		
NAME: FR-LED-6-S15W-5CCT-FG-WH	TYPE:	WEIGHT:
SPEC.: 3500K 90	DIM.:	SERIAL No.:
MFR.: LTS	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL		Imax (cd)	1629	S/MH (C0/180)	0.64
NOMINAL POWER (W)	15	LOR (%)	100.0	S/MH (C90/270)	0.63
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	1347.3	η UP, DN (C0-180)	0.0, 48.7
NOMINAL FLUX (lm)	1347.3	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 51.3
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.75
TEST VOLTAGE (V)	120	η down (%)	100.0	CIBSE SHR MAX	0.75

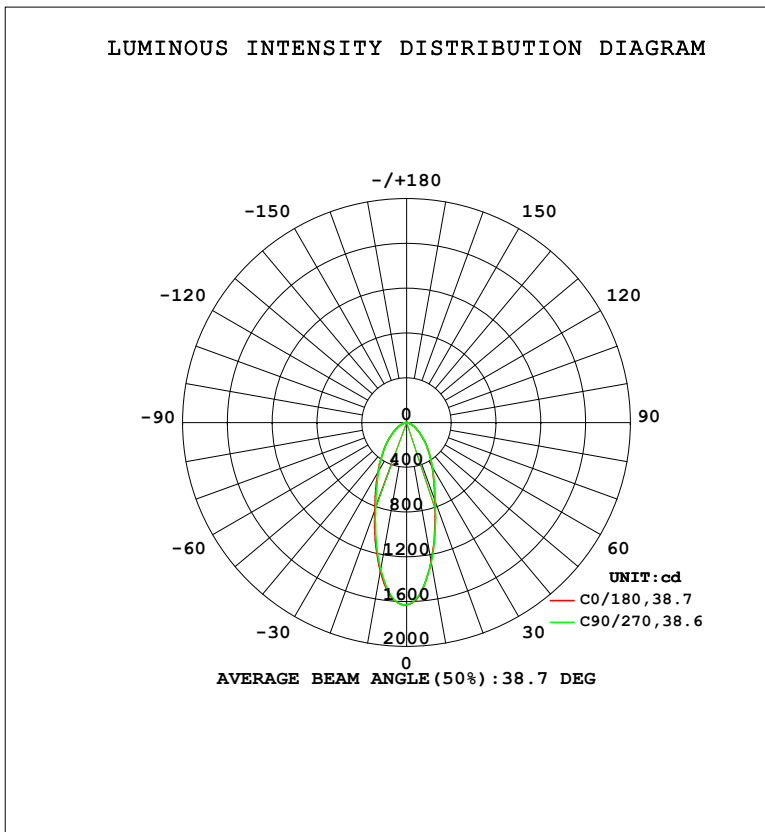

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators:
 Test Date: 2022-12-19

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.090m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	1260	1258	1270	1328	1353	1341	1334	1284	0- 10	139.1	139.1	10.3,10.3
20	742.8	733.9	752.5	808.3	834.2	825.0	815.1	774.9	10- 20	285.5	424.7	31.5,31.5
30	456.1	450.3	463.1	495.8	514.0	513.2	501.7	473.4	20- 30	282.4	707.1	52.5,52.5
40	284.7	281.2	287.9	306.4	319.5	325.9	317.2	296.5	30- 40	241.0	948.0	70.4,70.4
50	163.7	162.1	165.3	175.8	185.1	190.9	186.8	171.6	40- 50	180.6	1129	83.8,83.8
60	87.92	87.00	88.45	94.16	98.77	101.8	99.94	91.83	50- 60	116.7	1245	92.4,92.4
70	41.58	40.74	42.29	46.16	48.56	49.62	48.79	44.39	60- 70	67.03	1312	97.4,97.4
80	12.81	8.471	8.692	15.76	17.04	16.09	16.09	14.26	70- 80	30.02	1342	99.6,99.6
90	0.2317	0.2173	0.2141	0.2272	0.1450	0.1415	0.1438	0.1600	80- 90	4.882	1347	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3 °C
 Operators:
 Test Date:2022-12-19

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:119.74V I:0.1110A P:13.103W PF:0.9858 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1347.3x1 lm		
NAME: FR-LED-6-S15W-5CCT-FG-WH	TYPE:	WEIGHT:
SPEC.: 3500K 90	DIM.:	SERIAL No.:
MFR.: LTS	SUR.:	Shielding Angle:

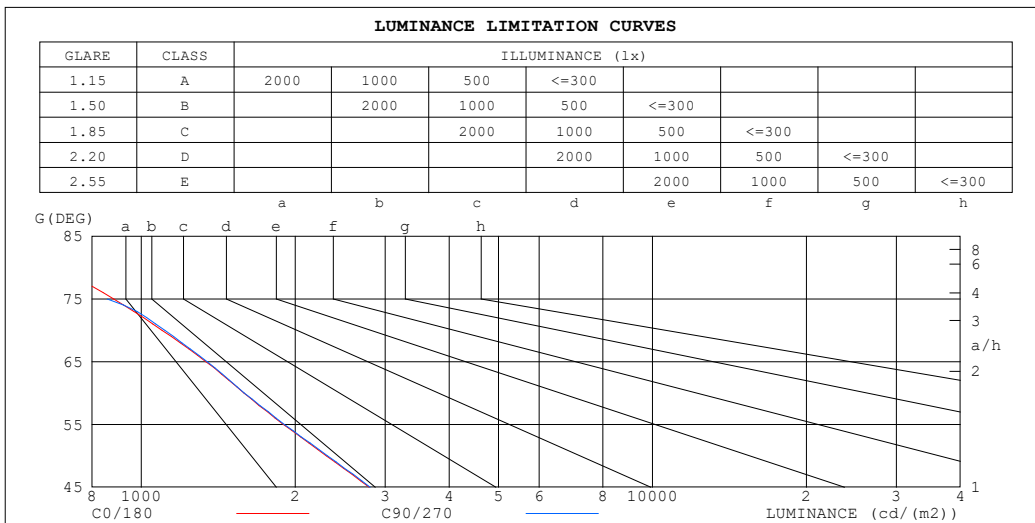

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	325	35
80	666	450
75	883	858
70	1098	1112
65	1337	1345
60	1588	1591
55	1896	1905
50	2301	2313
45	2790	2805


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-12-19

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.74V I:0.1110A P:13.103W PF:0.9858 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1347.3x1 lm		
NAME: FR-LED-6-S15W-5CCT-FG-WH	TYPE:	WEIGHT:
SPEC.: 3500K 90	DIM.:	SERIAL No.:
MFR.: LTS	SUR.:	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.08	1.05	1.02	1.06	1.03	1.01	1.02	.90	.98	.98	.96	.95	.95	.93	.92	.90
2.0	.98	.93	.89	.97	.92	.88	.93	.89	.86	.90	.87	.84	.87	.85	.82	.81
3.0	.90	.84	.79	.88	.83	.78	.86	.81	.77	.83	.79	.76	.81	.77	.74	.73
4.0	.82	.76	.70	.81	.75	.70	.79	.73	.69	.77	.72	.68	.75	.71	.67	.66
5.0	.76	.69	.64	.75	.68	.63	.73	.67	.63	.71	.66	.62	.70	.65	.62	.60
6.0	.70	.63	.58	.70	.63	.58	.68	.62	.58	.66	.61	.57	.65	.60	.57	.55
7.0	.66	.58	.54	.65	.58	.53	.63	.57	.53	.62	.57	.53	.61	.56	.52	.51
8.0	.61	.54	.50	.61	.54	.49	.59	.53	.49	.58	.53	.49	.57	.52	.49	.47
9.0	.57	.51	.46	.57	.50	.46	.56	.50	.46	.55	.50	.46	.54	.49	.45	.44
10.0	.54	.48	.43	.54	.47	.43	.53	.47	.43	.52	.47	.43	.51	.46	.43	.41

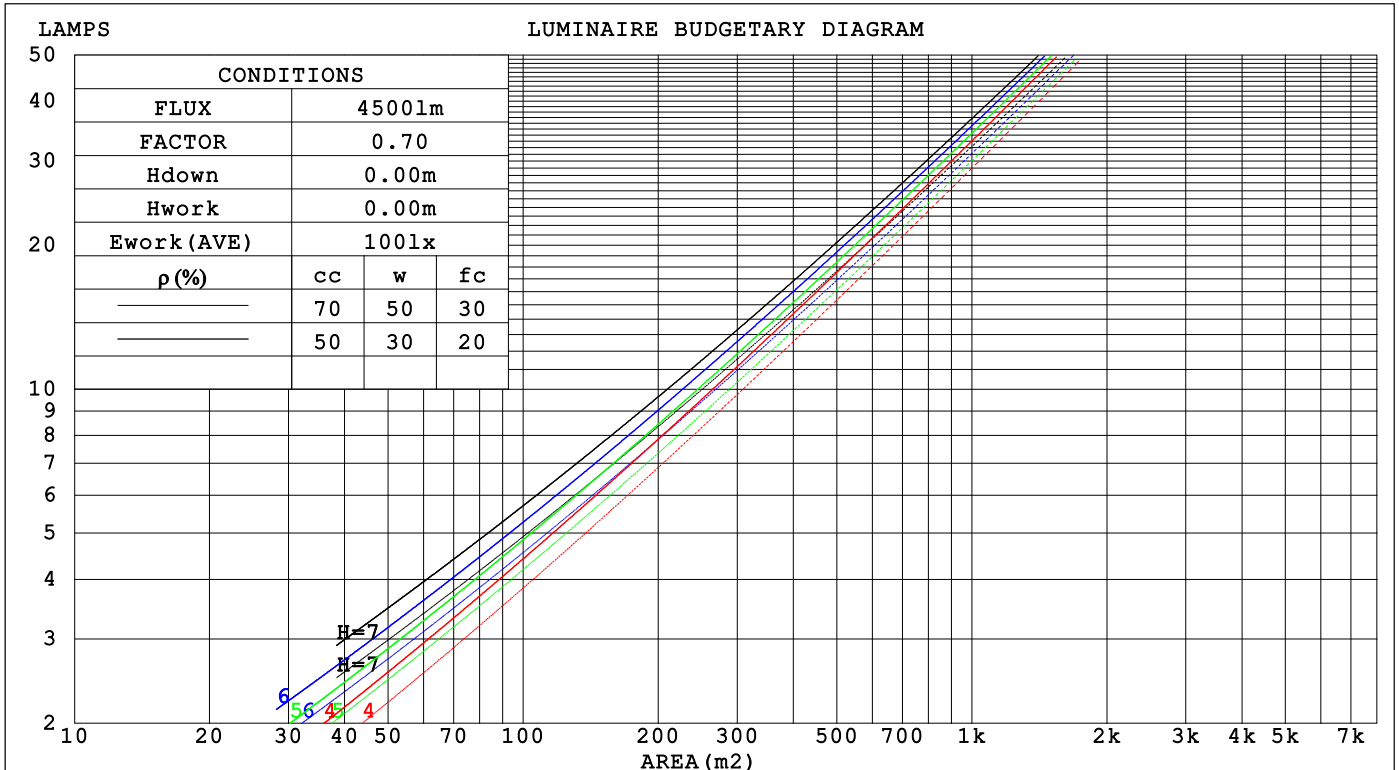

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-12-19

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:119.74V I:0.1110A P:13.103W PF:0.9858 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1347.3x1 lm		
NAME: FR-LED-6-S15W-5CCT-FG-WH	TYPE:	WEIGHT:
SPEC.: 3500K 90	DIM.:	SERIAL No.:
MFR.: LTS	SUR.:	Shielding Angle:

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.223	.127	.040	.216	.123	.039	.204	.117	.037	.192	.111	.036	.181	.105	.034	
2.0	.215	.118	.036	.209	.115	.035	.198	.110	.034	.188	.105	.033	.178	.101	.032	
3.0	.203	.108	.032	.198	.106	.032	.188	.102	.031	.179	.098	.030	.171	.095	.029	
4.0	.191	.099	.029	.186	.097	.029	.178	.094	.028	.170	.091	.028	.163	.089	.027	
5.0	.179	.091	.026	.175	.090	.026	.168	.087	.026	.161	.085	.025	.155	.083	.025	
6.0	.169	.085	.024	.165	.084	.024	.159	.081	.024	.153	.079	.023	.147	.077	.023	
7.0	.159	.079	.022	.156	.078	.022	.150	.076	.022	.145	.074	.022	.140	.073	.021	
8.0	.150	.074	.021	.148	.073	.021	.143	.071	.020	.138	.070	.020	.133	.068	.020	
9.0	.143	.069	.019	.140	.068	.019	.136	.067	.019	.131	.066	.019	.127	.065	.019	
10.0	.135	.065	.018	.133	.064	.018	.129	.063	.018	.125	.062	.018	.121	.061	.018	

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.174	.157	.141	.149	.135	.122	.102	.093	.084	.059	.054	.049	.019	.017	.016	
2.0	.162	.132	.107	.139	.114	.093	.095	.079	.065	.055	.046	.038	.018	.015	.012	
3.0	.152	.114	.084	.130	.098	.073	.089	.068	.051	.052	.040	.030	.017	.013	.010	
4.0	.142	.100	.067	.122	.086	.058	.084	.060	.041	.049	.035	.024	.016	.011	.008	
5.0	.134	.089	.055	.115	.077	.048	.079	.054	.034	.046	.031	.020	.015	.010	.007	
6.0	.127	.080	.046	.109	.069	.040	.075	.048	.028	.044	.028	.017	.014	.009	.006	
7.0	.120	.072	.039	.104	.063	.034	.072	.044	.024	.042	.026	.014	.013	.008	.005	
8.0	.114	.066	.033	.099	.057	.029	.068	.040	.021	.040	.024	.012	.013	.008	.004	
9.0	.109	.061	.029	.094	.053	.025	.065	.037	.018	.038	.022	.011	.012	.007	.004	
10.0	.104	.057	.025	.090	.049	.022	.062	.035	.016	.036	.021	.009	.012	.007	.003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-12-19

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:119.74V I:0.1110A P:13.103W PF:0.9858 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1347.3x1 lm		
NAME: FR-LED-6-S15W-5CCT-FG-WH	TYPE:	WEIGHT:
SPEC.: 3500K 90	DIM.:	SERIAL No.:
MFR.: LTS	SUR.:	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2

Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	12.3	13.5	12.6	13.7	13.8	12.3	13.5	12.6	13.7	13.8
3H	12.9	14.0	13.2	14.2	14.4	12.9	14.0	13.2	14.2	14.4
4H	13.1	14.1	13.4	14.4	14.6	13.1	14.1	13.4	14.4	14.6
6H	13.2	14.2	13.5	14.4	14.7	13.1	14.1	13.5	14.4	14.6
8H	13.2	14.1	13.5	14.4	14.7	13.1	14.0	13.4	14.3	14.6
12H	13.2	14.0	13.5	14.3	14.6	13.1	13.9	13.4	14.2	14.5
4H 2H	12.6	13.6	12.8	13.8	14.0	12.6	13.6	12.9	13.8	14.0
3H	13.3	14.2	13.7	14.5	14.8	13.3	14.2	13.7	14.5	14.8
4H	13.6	14.4	13.9	14.7	15.0	13.6	14.4	14.0	14.7	15.0
6H	13.7	14.4	14.1	14.8	15.1	13.7	14.4	14.0	14.7	15.1
8H	13.8	14.4	14.2	14.8	15.1	13.6	14.3	14.0	14.6	15.0
12H	13.7	14.3	14.1	14.7	15.1	13.6	14.2	14.0	14.6	15.0
8H 4H	13.6	14.3	14.0	14.6	15.0	13.6	14.3	14.0	14.6	15.0
6H	13.8	14.4	14.2	14.8	15.2	13.7	14.3	14.1	14.7	15.1
8H	13.8	14.3	14.3	14.7	15.2	13.7	14.2	14.1	14.6	15.0
12H	13.8	14.2	14.3	14.7	15.2	13.6	14.0	14.1	14.5	15.0
12H 4H	13.6	14.2	14.0	14.6	15.0	13.6	14.2	14.0	14.6	15.0
6H	13.8	14.3	14.2	14.7	15.1	13.7	14.2	14.1	14.6	15.0
8H	13.8	14.2	14.3	14.7	15.1	13.7	14.1	14.1	14.5	15.0

Variations with the observer position at spacings(CIE Pub.117):		
S = 1.0H	+ 0.6 / - 0.8	+ 0.6 / - 0.8
1.5H	+ 0.5 / - 0.4	+ 0.5 / - 0.4
2.0H	+ 1.3 / - 1.0	+ 1.3 / - 1.0

CIE Pub.117, 1347 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 1.0)
 Area: 0.111111 m2

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-12-19

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:119.74V I:0.1110A P:13.103W PF:0.9858 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1347.3x1 lm		
NAME: FR-LED-6-S15W-5CCT-FG-WH	TYPE:	WEIGHT:
SPEC.: 3500K 90	DIM.:	SERIAL No.:
MFR.: LTS	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	73	64	59	72	64	59	71	63	58	54
0.80	82	73	68	81	73	68	80	72	68	62
1.00	89	81	75	88	80	75	86	81	75	69
1.25	94	87	82	93	86	81	91	85	81	75
1.50	98	91	86	97	90	86	94	89	85	79
2.00	103	97	92	101	96	92	98	94	90	84
2.50	106	100	96	104	99	95	100	96	93	86
3.00	108	103	99	106	102	98	102	99	96	89
4.00	111	107	104	109	105	102	105	102	99	92
5.00	112	109	106	110	107	105	106	104	102	93
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-12-19

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:119.74V I:0.1110A P:13.103W PF:0.9858 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1347.3x1 lm		
NAME: FR-LED-6-S15W-5CCT-FG-WH	TYPE:	WEIGHT:
SPEC.: 3500K 90	DIM.:	SERIAL No.:
MFR.: LTS	SUR.:	Shielding Angle:

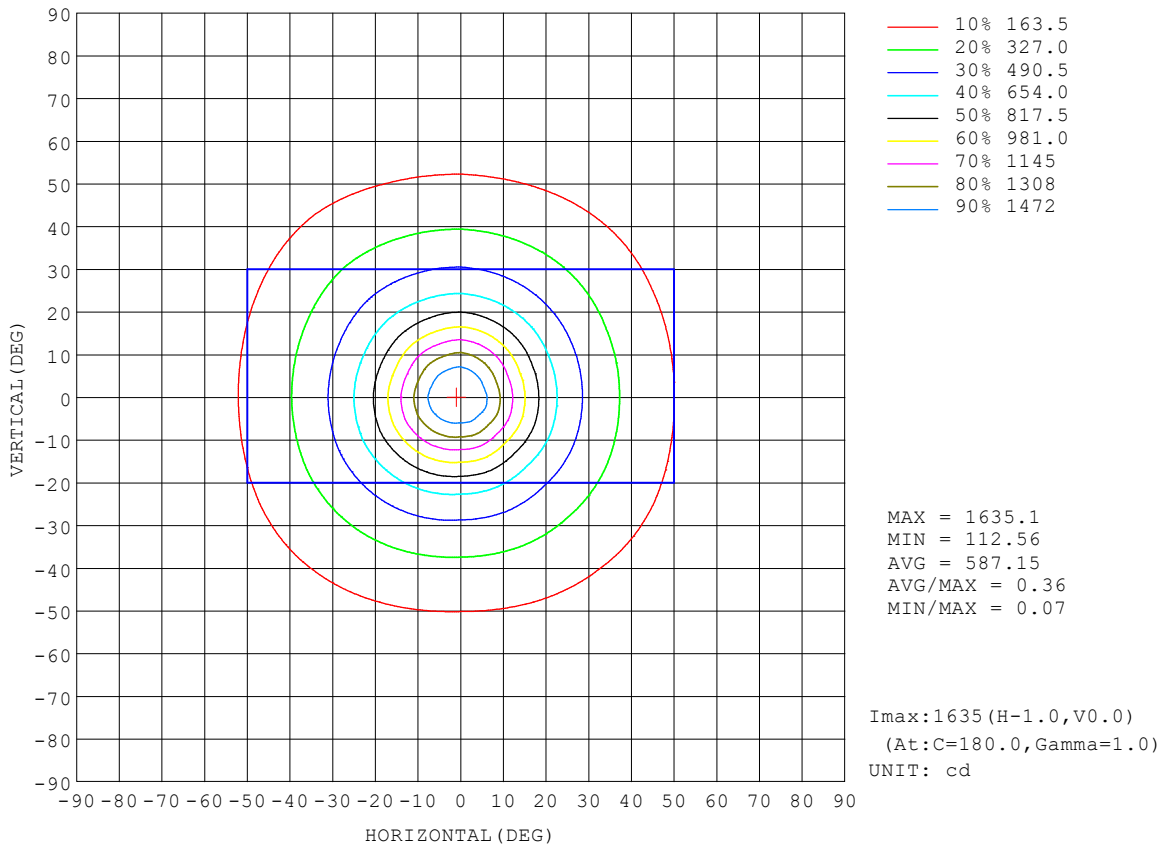


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-12-19

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

AAI Figure

Test:U:119.74V I:0.1110A P:13.103W PF:0.9858 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1347.3x1 lm		
NAME: FR-LED-6-S15W-5CCT-FG-WH	TYPE:	WEIGHT:
SPEC.: 3500K 90	DIM.:	SERIAL No.:
MFR.: LTS	SUR.:	Shielding Angle:

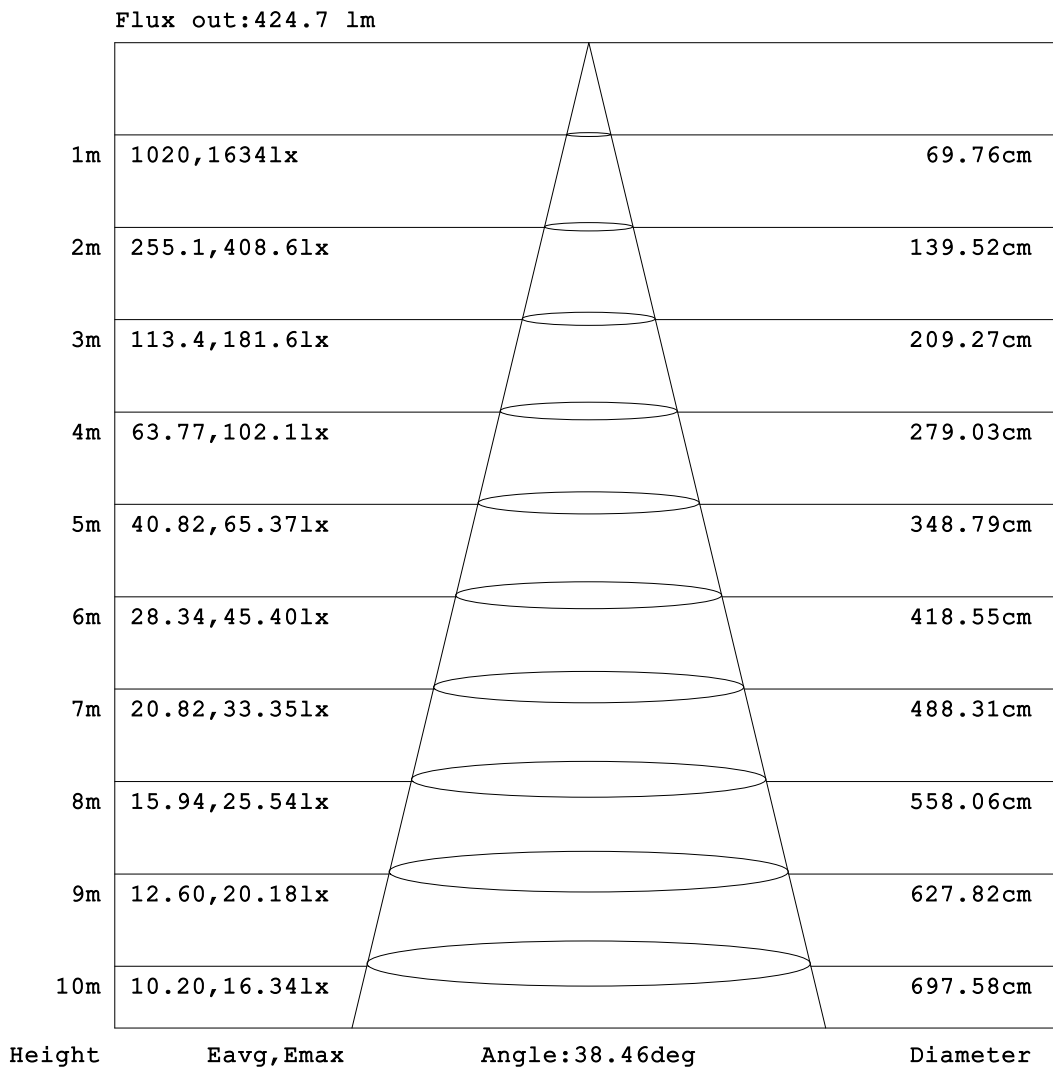


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-12-19

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:119.74V I:0.1110A P:13.103W PF:0.9858 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1347.3x1 lm		
NAME: FR-LED-6-S15W-5CCT-FG-WH	TYPE:	WEIGHT:
SPEC.: 3500K 90	DIM.:	SERIAL No.:
MFR.: LTS	SUR.:	Shielding Angle:

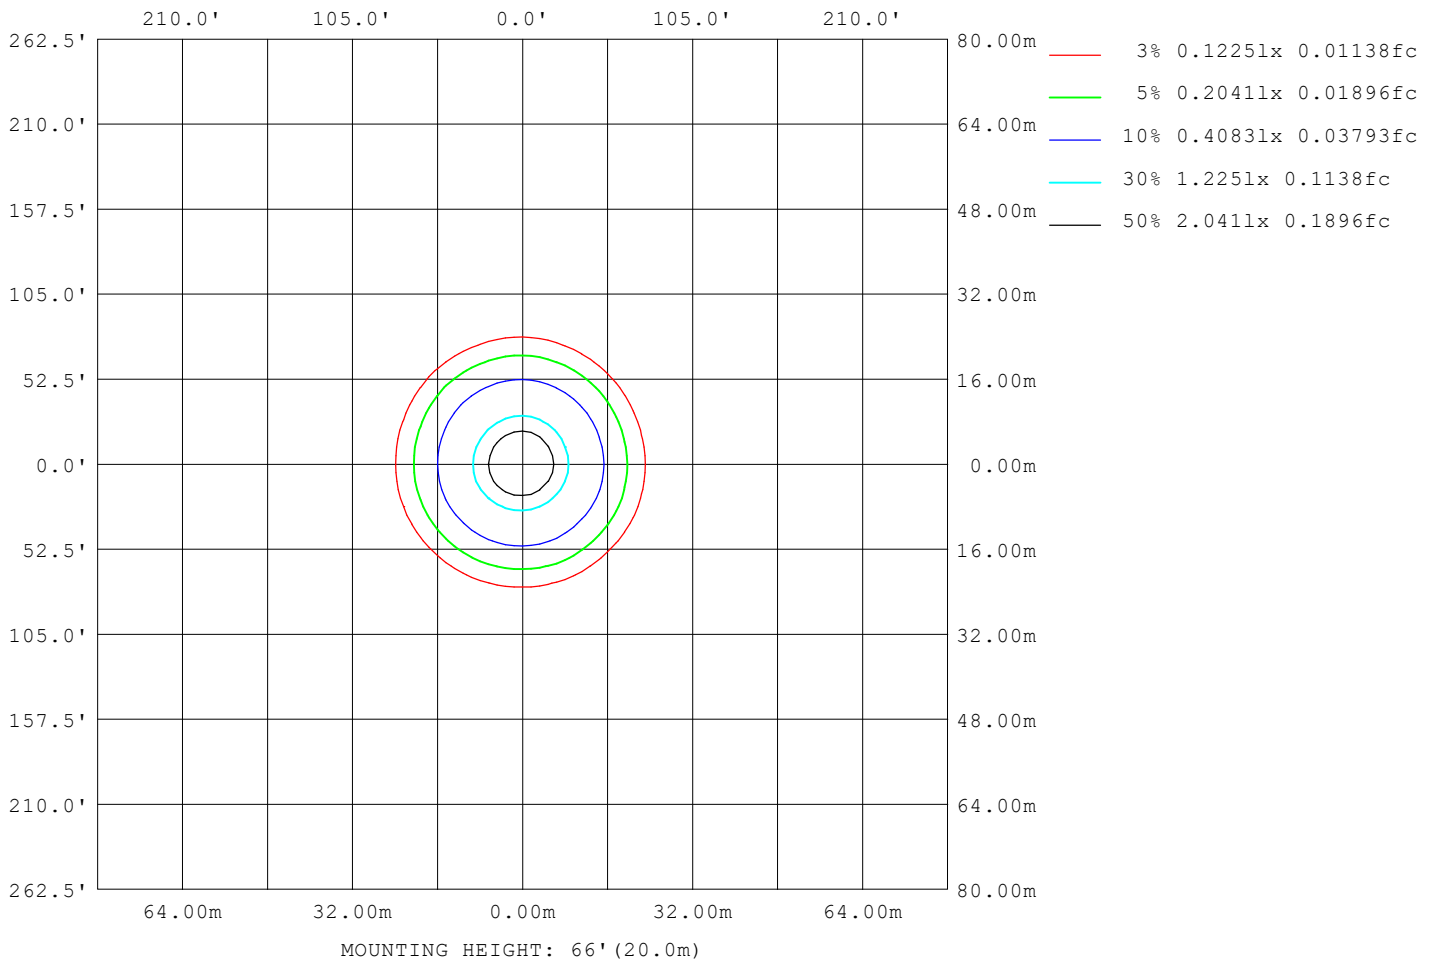

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-12-19

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:119.74V I:0.1110A P:13.103W PF:0.9858 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1347.3x1 lm		
NAME: FR-LED-6-S15W-5CCT-FG-WH	TYPE:	WEIGHT:
SPEC.: 3500K 90	DIM.:	SERIAL No.:
MFR.: LTS	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	1421
L_0~180 (75) av	978
L_0~180 (85) av	475
L_90~270 (65) av	1435
L_90~270 (75) av	962
L_90~270 (85) av	171
L_45 (65) av	1427
L_45 (75) av	972
L_45 (85) av	318

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:
 Test Date:2022-12-19

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

Planar Illuminance Curve

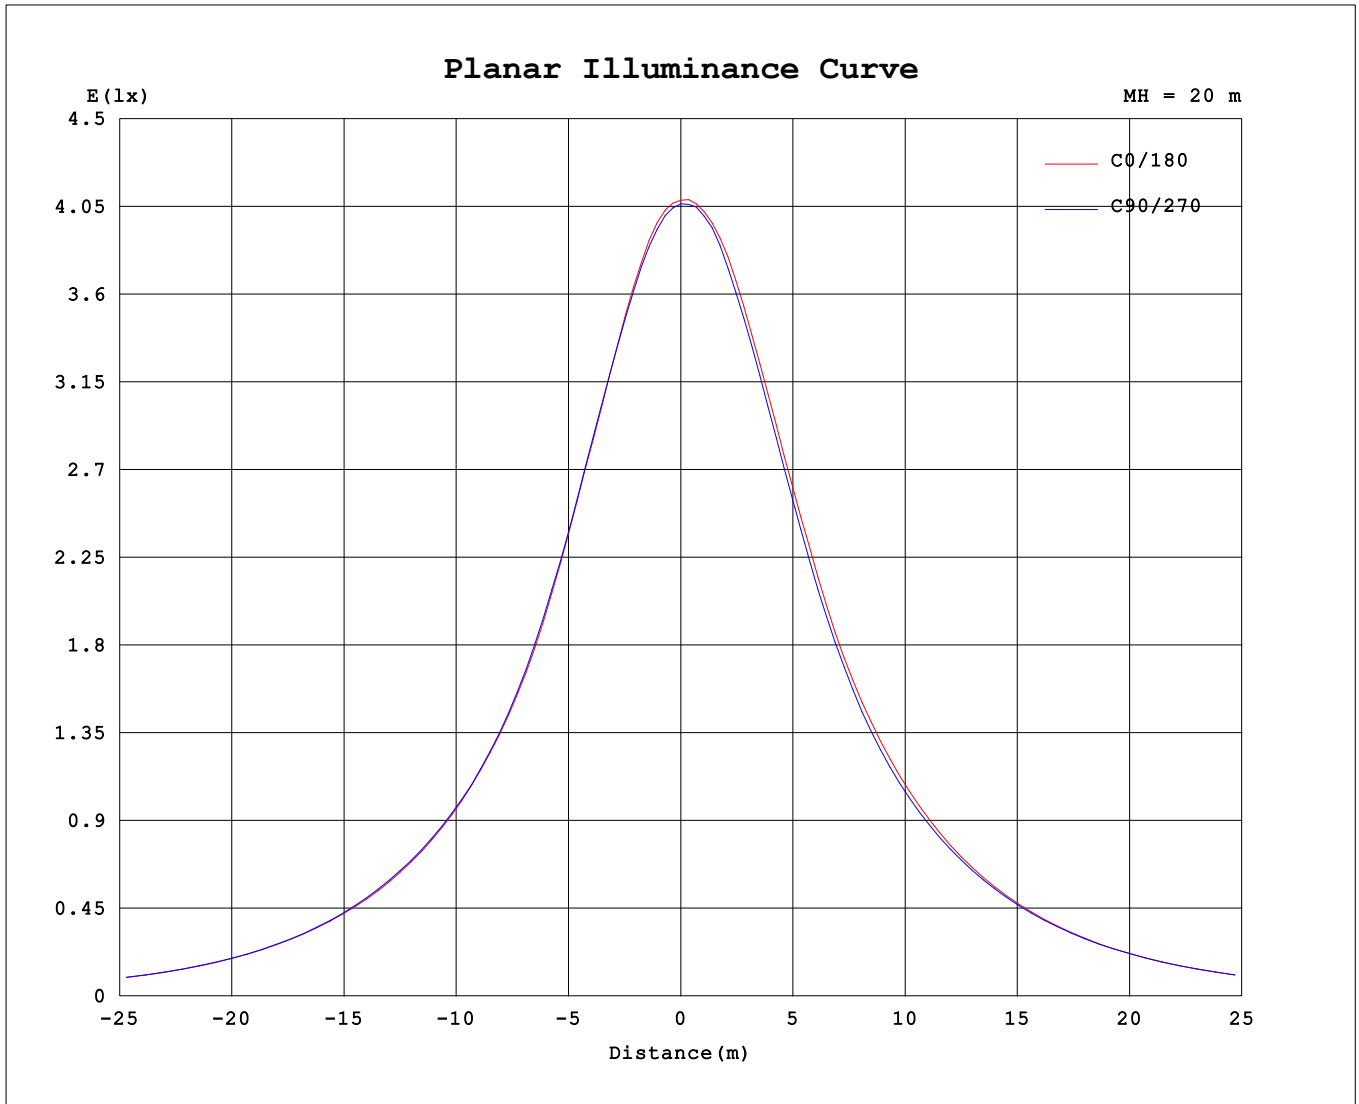

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators:
 Test Date: 2022-12-19

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.090m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.74V I:0.1110A P:13.103W PF:0.9858 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1347.3x1 lm		
NAME: FR-LED-6-S15W-5CCT-FG-WH	TYPE:	WEIGHT:
SPEC.: 3500K 90	DIM.:	SERIAL No.:
MFR.: LTS	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	1627	1627	1627	1627	1627	1627	1627	1627	1627	1627	1627	1627	1627	1627	1627	1627			
5	1517	1529	1513	1522	1515	1532	1549	1568	1568	1559	1564	1555	1560	1544	1529	1514			
10	1260	1272	1258	1274	1270	1298	1328	1356	1353	1336	1341	1327	1334	1310	1284	1261			
15	982	988	971	993	992	1028	1059	1091	1086	1066	1075	1058	1063	1039	1013	984			
20	743	747	734	751	753	781	808	838	834	820	825	813	815	793	775	750			
25	578	578	569	580	583	607	629	653	652	642	644	634	632	615	599	585			
30	456	456	450	460	463	479	496	513	514	510	513	505	502	487	473	463			
35	362	363	358	365	368	380	392	405	406	405	411	401	401	389	377	366			
40	285	286	281	287	288	297	306	317	320	320	326	319	317	307	296	287			
45	218	221	216	220	221	228	235	244	246	247	253	248	247	238	228	220			
50	164	166	162	165	165	171	176	183	185	186	191	187	187	179	172	165			
55	120	122	119	122	122	126	129	135	136	137	141	138	138	132	126	122			
60	87.9	88.7	87.0	88.8	88.5	91.5	94.2	98.3	98.8	98.8	102	100	99.9	95.7	91.8	88.7			
65	62.6	63.0	61.6	63.3	63.2	65.6	67.8	70.7	70.9	70.6	72.8	71.6	71.5	68.6	65.9	63.4			
70	41.6	41.9	40.7	42.2	42.3	44.3	46.2	48.5	48.6	48.1	49.6	48.7	48.8	46.6	44.4	42.3			
75	25.3	25.5	24.1	24.8	24.7	27.5	29.1	31.0	30.9	30.4	31.3	30.5	30.6	29.0	27.4	25.8			
80	12.8	11.8	8.47	8.30	8.69	12.7	15.8	17.2	17.0	16.5	16.1	15.3	16.1	15.5	14.3	13.2			
85	3.13	1.71	0.37	0.30	0.34	1.82	4.80	6.33	6.06	3.83	2.99	2.38	2.97	3.56	4.16	3.60			
90	0.23	0.22	0.22	0.22	0.21	0.23	0.23	0.48	0.14	0.14	0.14	0.15	0.14	0.15	0.16	0.17			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-12-19

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks: