



# LLL-LD50WH

## 347V input 0-10V Dimmable Driver for Lotus LED Lights model LL10R



Project: \_\_\_\_\_

Location: \_\_\_\_\_

Qty: \_\_\_\_\_


Notes: \_\_\_\_\_

### DESCRIPTION

347V Input Driver 0-10V Dimmable for Lotus LED Lights model LL10R  
Output 30-38 V DC, Constant Current 1280 mA, PF > 0.9  
Connection box wire capacity: Maximum of 5 No 12 AWG or 8 No 14 AWG

DIMENSIONS: 5" x 3 1/2" x 1 1/2"

### COMPATIBLE FIXTURES **LL10R**

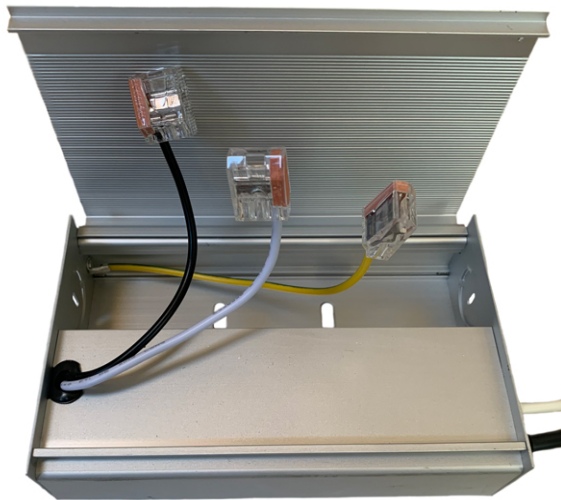

### CABLE CONNECTORS 2 knock-outs 7/8"

### MOUNTING directly on joist

### ORDERING GUIDE cat # **LLL-LD50WH**

**Input:** White (Neutral) & Black (Hot) wires with quick connectors. Connect to 347V AC according to the Dimmer Manufacturer's Instructions.

**Output:** Plastic FT4 / CMR rated cable with screw-in connector. Connect to compatible Lotus LED fixture from the list above

**0-10V control wires:** Black (-) and Red (+). Connect to dimming or control system 0-10V only. **DO NOT CONNECT TO LINE VOLTAGE.**  
If you short the Black and Red wires the driver would shut off.

**Warning:** This driver is UL / cUL certified to be used only with Lotus LED Lights fixtures.  
Connecting it to any other manufacturer's fixtures will void certification and warranty and may cause overheating and fire.