
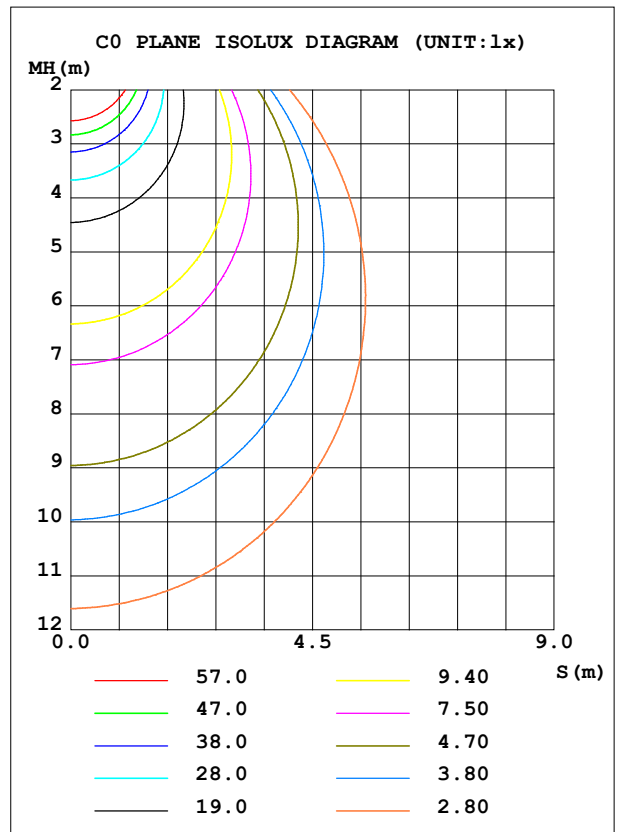


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:119.75V I:0.1815A P:14.024W PF:0.6453 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1046.05x1 lm		
NAME: FR-LED-6-S15W-5CCTWH	TYPE:	WEIGHT:
SPEC.: 5000K 90	DIM.:	SERIAL No.:
MFR.: LTS	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL		Imax (cd)	376.9	S/MH (C0/180)	1.25
NOMINAL POWER (W)	15	LOR (%)	100.0	S/MH (C90/270)	1.23
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	1046.1	η UP, DN (C0-180)	0.0, 50.6
NOMINAL FLUX (lm)	1046.05	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 49.4
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	120	η down (%)	100.0	CIBSE SHR MAX	1.35

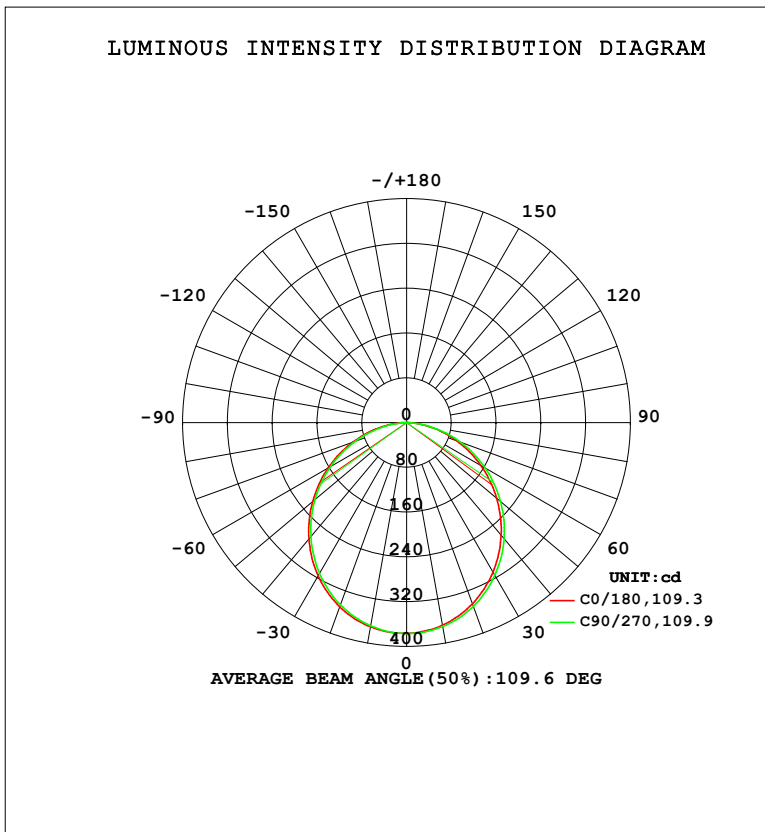

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators:
 Test Date: 2022-12-19

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.090m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	367.7	368.8	370.0	371.2	370.5	369.6	368.7	367.5	0- 10	35.60	35.60	3.4,3.4
20	344.3	346.9	349.2	351.0	350.4	347.7	346.0	344.2	10- 20	101.6	137.2	13.1,13.1
30	308.7	312.0	315.2	318.1	316.4	313.3	311.4	308.3	20- 30	152.8	290.0	27.7,27.7
40	262.8	267.0	271.2	273.8	271.6	268.0	266.2	262.5	30- 40	182.3	472.3	45.1,45.1
50	210.1	214.8	218.7	221.8	219.2	215.5	213.8	210.0	40- 50	187.0	659.3	63,63
60	153.0	157.7	161.8	164.4	161.7	158.0	156.3	152.5	50- 60	167.3	826.6	79,79
70	94.88	99.22	102.7	105.3	102.4	98.61	97.21	94.09	60- 70	127.4	954.0	91.2,91.2
80	39.83	39.59	42.10	48.13	45.74	39.27	38.23	38.99	70- 80	73.94	1028	98.3,98.3
90	0.5118	0.4543	0.4542	0.7252	0.3657	0.2902	0.2997	0.3711	80- 90	18.12	1046	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3 °C
 Operators:
 Test Date:2022-12-19

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:119.75V I:0.1815A P:14.024W PF:0.6453 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1046.05x1 lm		
NAME: FR-LED-6-S15W-5CCTWH	TYPE:	WEIGHT:
SPEC.: 5000K 90	DIM.:	SERIAL No.:
MFR.: LTS	SUR.:	Shielding Angle:

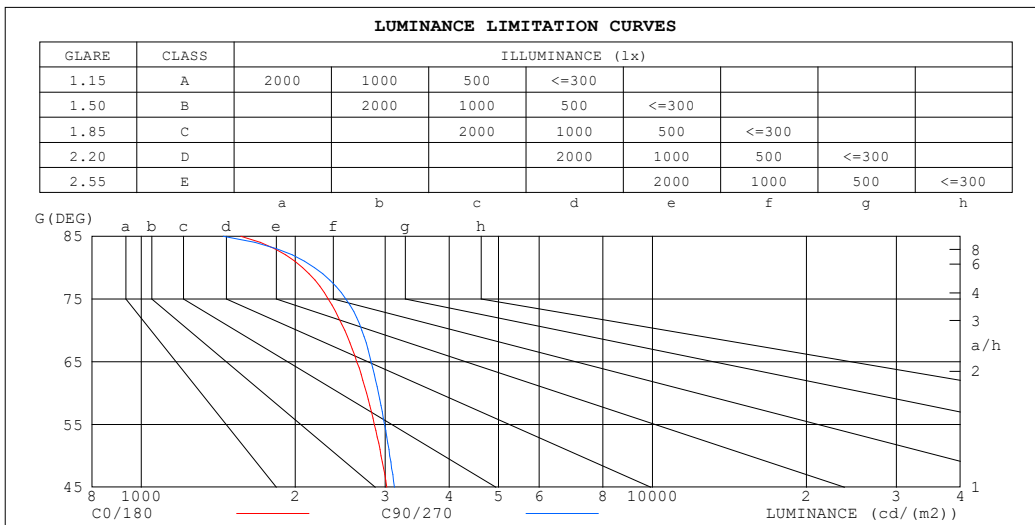

LUMINANCE cd/ (m2)		
G (DEG)	C0/180	C90/270
85	1566	1445
80	2067	2181
75	2319	2513
70	2500	2700
65	2639	2817
60	2757	2910
55	2856	2991
50	2945	3061
45	3023	3126


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-12-19

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.75V I:0.1815A P:14.024W PF:0.6453 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1046.05x1 lm		
NAME: FR-LED-6-S15W-5CCTWH	TYPE:	WEIGHT:
SPEC.: 5000K 90	DIM.:	SERIAL No.:
MFR.: LTS	SUR.:	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.04	.00	.96	1.02	.98	.94	.97	.94	.91	.94	.91	.89	.90	.88	.86	.84
2.0	.91	.84	.78	.89	.82	.77	.85	.80	.75	.82	.77	.74	.79	.75	.72	.70
3.0	.80	.71	.65	.78	.70	.64	.75	.68	.63	.72	.67	.62	.70	.65	.61	.59
4.0	.70	.62	.55	.69	.61	.55	.67	.59	.54	.64	.58	.53	.62	.57	.52	.50
5.0	.63	.54	.47	.62	.53	.47	.60	.52	.47	.58	.51	.46	.56	.50	.45	.43
6.0	.57	.48	.41	.56	.47	.41	.54	.46	.41	.52	.46	.40	.51	.45	.40	.38
7.0	.51	.43	.36	.51	.42	.36	.49	.42	.36	.48	.41	.36	.46	.40	.36	.34
8.0	.47	.38	.33	.46	.38	.32	.45	.38	.32	.44	.37	.32	.42	.36	.32	.30
9.0	.43	.35	.29	.42	.35	.29	.41	.34	.29	.40	.34	.29	.39	.33	.29	.27
10.0	.40	.32	.27	.39	.32	.27	.38	.31	.26	.37	.31	.26	.36	.30	.26	.24

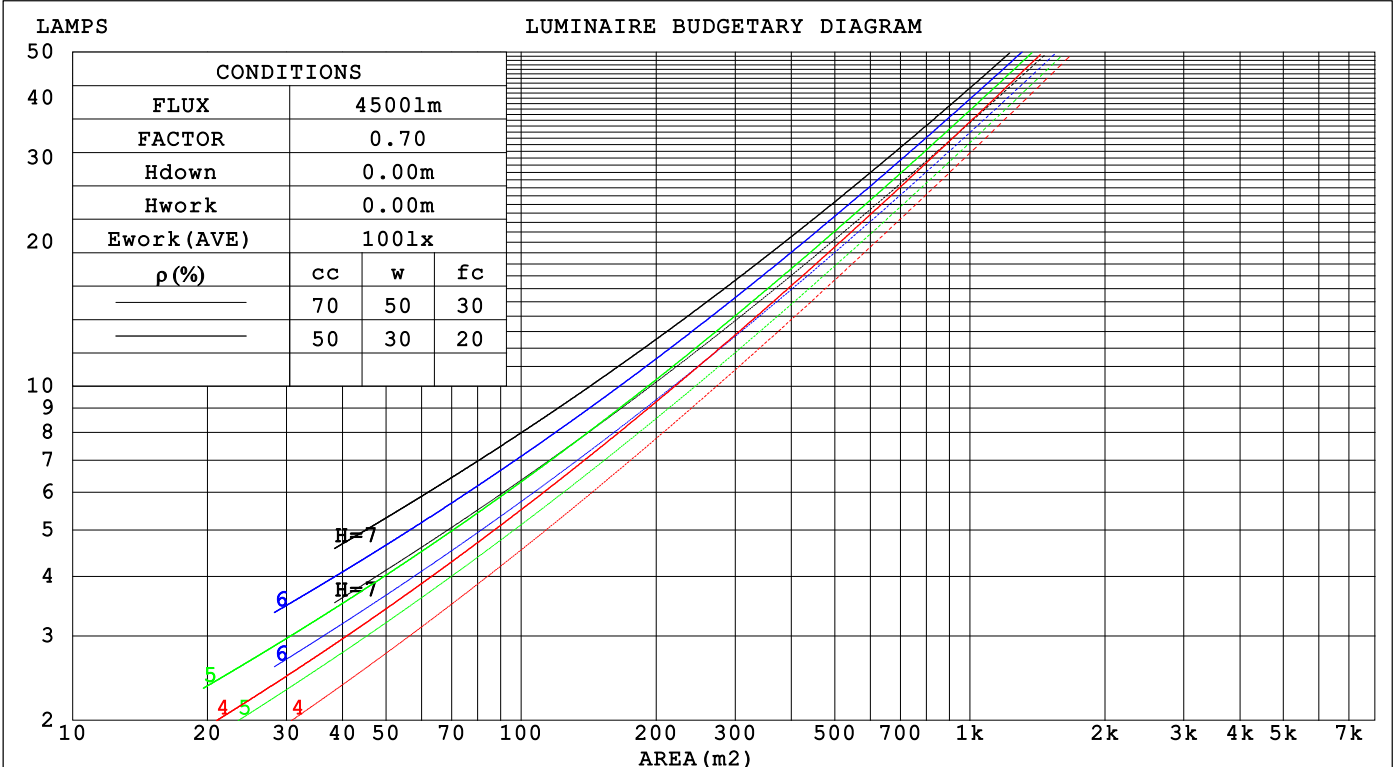

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-12-19

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:119.75V I:0.1815A P:14.024W PF:0.6453 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1046.05x1 lm		
NAME: FR-LED-6-S15W-5CCTWH	TYPE:	WEIGHT:
SPEC.: 5000K 90	DIM.:	SERIAL No.:
MFR.: LTS	SUR.:	Shielding Angle:

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.308	.175	.055	.301	.171	.054	.287	.165	.053	.275	.159	.051	.264	.153	.049	
2.0	.290	.159	.049	.284	.156	.048	.272	.151	.047	.261	.147	.046	.252	.142	.045	
3.0	.269	.143	.043	.263	.141	.042	.253	.137	.042	.243	.133	.041	.235	.130	.040	
4.0	.248	.129	.038	.243	.127	.038	.234	.124	.037	.226	.121	.037	.218	.118	.036	
5.0	.229	.117	.034	.225	.116	.034	.217	.113	.033	.209	.111	.033	.202	.108	.032	
6.0	.213	.107	.031	.209	.106	.030	.202	.103	.030	.195	.101	.030	.189	.099	.030	
7.0	.198	.098	.028	.195	.097	.028	.188	.095	.027	.182	.093	.027	.177	.092	.027	
8.0	.185	.090	.025	.182	.090	.025	.176	.088	.025	.171	.087	.025	.166	.085	.025	
9.0	.174	.084	.023	.171	.083	.023	.166	.082	.023	.161	.081	.023	.156	.079	.023	
10.0	.163	.078	.022	.161	.078	.022	.156	.076	.022	.152	.075	.021	.147	.074	.021	

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0																
1.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
2.0	.172	.132	.098	.147	.114	.085	.101	.079	.059	.058	.046	.035	.019	.015	.011	
3.0	.164	.114	.074	.141	.099	.065	.097	.068	.045	.056	.040	.027	.018	.013	.009	
4.0	.157	.101	.058	.134	.087	.051	.092	.061	.036	.053	.036	.021	.017	.012	.007	
5.0	.149	.091	.047	.128	.078	.041	.088	.055	.029	.051	.032	.017	.016	.010	.006	
6.0	.142	.082	.039	.122	.071	.034	.084	.050	.024	.049	.029	.014	.016	.010	.005	
7.0	.135	.075	.033	.116	.065	.029	.080	.046	.021	.047	.027	.012	.015	.009	.004	
8.0	.129	.069	.029	.111	.060	.025	.077	.042	.018	.045	.025	.011	.014	.008	.004	
9.0	.123	.065	.025	.106	.056	.022	.073	.039	.016	.043	.023	.009	.014	.008	.003	
10.0	.117	.060	.022	.101	.052	.020	.070	.037	.014	.041	.022	.008	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-12-19

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:119.75V I:0.1815A P:14.024W PF:0.6453 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1046.05x1 lm										
NAME: FR-LED-6-S15W-5CCTWH					TYPE:			WEIGHT:		
SPEC.: 5000K 90					DIM.:			SERIAL No.:		
MFR.: LTS					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	16.3	17.9	16.6	18.1	18.3	16.5	18.1	16.8	18.3	18.5
3H	17.8	19.2	18.1	19.5	19.7	18.1	19.5	18.4	19.7	20.0
4H	18.4	19.8	18.7	20.0	20.3	18.7	20.1	19.0	20.3	20.6
6H	18.8	20.1	19.2	20.4	20.7	19.2	20.4	19.5	20.7	21.0
8H	19.0	20.2	19.3	20.5	20.8	19.3	20.5	19.6	20.8	21.1
12H	19.0	20.2	19.4	20.5	20.8	19.3	20.5	19.7	20.8	21.1
4H 2H	17.0	18.3	17.3	18.6	18.8	17.1	18.5	17.4	18.7	19.0
3H	18.7	19.8	19.0	20.1	20.4	18.9	20.1	19.2	20.3	20.7
4H	19.4	20.4	19.8	20.8	21.1	19.6	20.7	20.0	21.0	21.4
6H	19.9	20.9	20.3	21.2	21.6	20.2	21.1	20.6	21.5	21.9
8H	20.1	21.0	20.5	21.3	21.7	20.4	21.2	20.8	21.6	22.0
12H	20.2	21.0	20.6	21.4	21.8	20.4	21.2	20.9	21.6	22.0
8H 4H	19.7	20.5	20.1	20.9	21.3	19.9	20.8	20.3	21.1	21.5
6H	20.3	21.1	20.8	21.5	21.9	20.6	21.3	21.0	21.7	22.1
8H	20.6	21.2	21.1	21.7	22.1	20.8	21.5	21.3	21.9	22.3
12H	20.8	21.3	21.2	21.8	22.2	20.9	21.5	21.4	21.9	22.4
12H 4H	19.7	20.5	20.1	20.9	21.3	19.9	20.7	20.3	21.1	21.5
6H	20.4	21.0	20.9	21.5	21.9	20.6	21.3	21.1	21.7	22.1
8H	20.7	21.2	21.2	21.7	22.2	20.9	21.4	21.4	21.9	22.4
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.2 / - 0.2					+ 0.2 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				

CIE Pub.117, 1046 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 0.2)
 Area: 0.111111 m2

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-12-19

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:119.75V I:0.1815A P:14.024W PF:0.6453 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1046.05x1 lm		
NAME: FR-LED-6-S15W-5CCTWH	TYPE:	WEIGHT:
SPEC.: 5000K 90	DIM.:	SERIAL No.:
MFR.: LTS	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	58	46	39	57	46	39	56	46	39	33
0.80	68	56	49	67	56	49	65	55	48	42
1.00	76	65	58	75	65	58	73	66	57	50
1.25	83	73	66	82	72	65	79	71	65	57
1.50	88	78	71	87	78	71	84	76	70	62
2.00	95	87	80	93	85	79	90	83	78	70
2.50	99	91	85	97	90	84	93	87	82	74
3.00	102	96	90	100	94	89	96	91	87	78
4.00	106	101	96	104	99	95	100	96	92	83
5.00	109	104	100	106	102	98	102	98	95	86
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-12-19

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:119.75V I:0.1815A P:14.024W PF:0.6453 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1046.05x1 lm		
NAME: FR-LED-6-S15W-5CCTWH	TYPE:	WEIGHT:
SPEC.: 5000K 90	DIM.:	SERIAL No.:
MFR.: LTS	SUR.:	Shielding Angle:

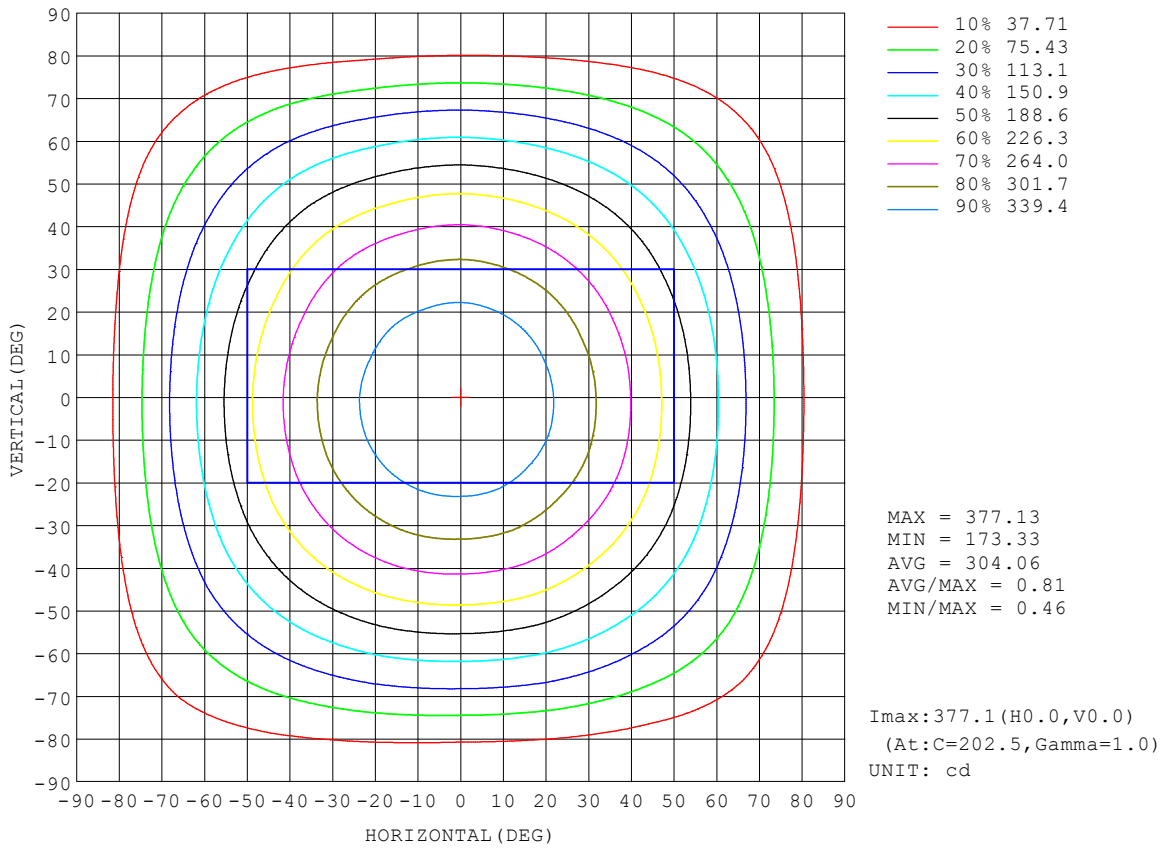


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-12-19

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

AAI Figure

Test:U:119.75V I:0.1815A P:14.024W PF:0.6453 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1046.05x1 lm		
NAME: FR-LED-6-S15W-5CCTWH	TYPE:	WEIGHT:
SPEC.: 5000K 90	DIM.:	SERIAL No.:
MFR.: LTS	SUR.:	Shielding Angle:

Flux out:746.8 lm

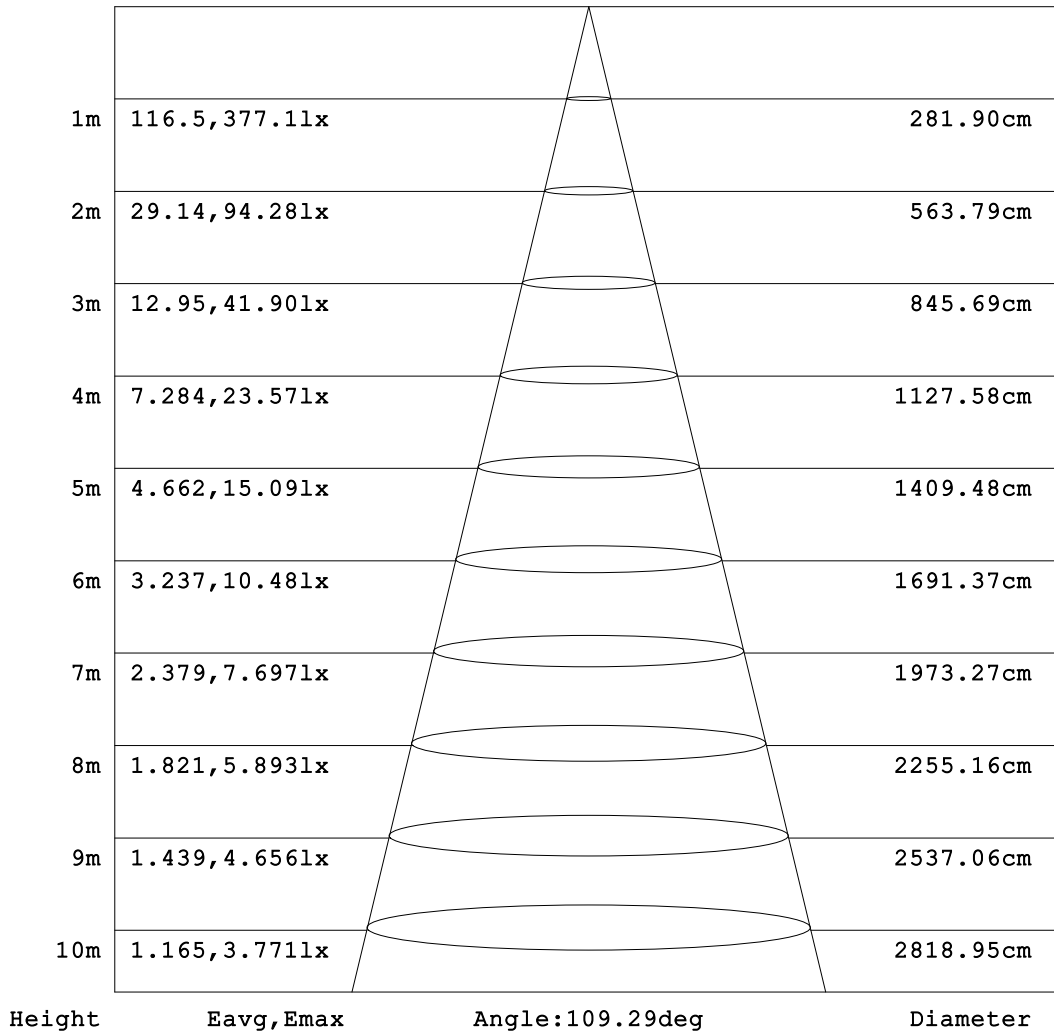


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators:
 Test Date: 2022-12-19

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.090m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:119.75V I:0.1815A P:14.024W PF:0.6453 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1046.05x1 lm		
NAME: FR-LED-6-S15W-5CCTWH	TYPE:	WEIGHT:
SPEC.: 5000K 90	DIM.:	SERIAL No.:
MFR.: LTS	SUR.:	Shielding Angle:

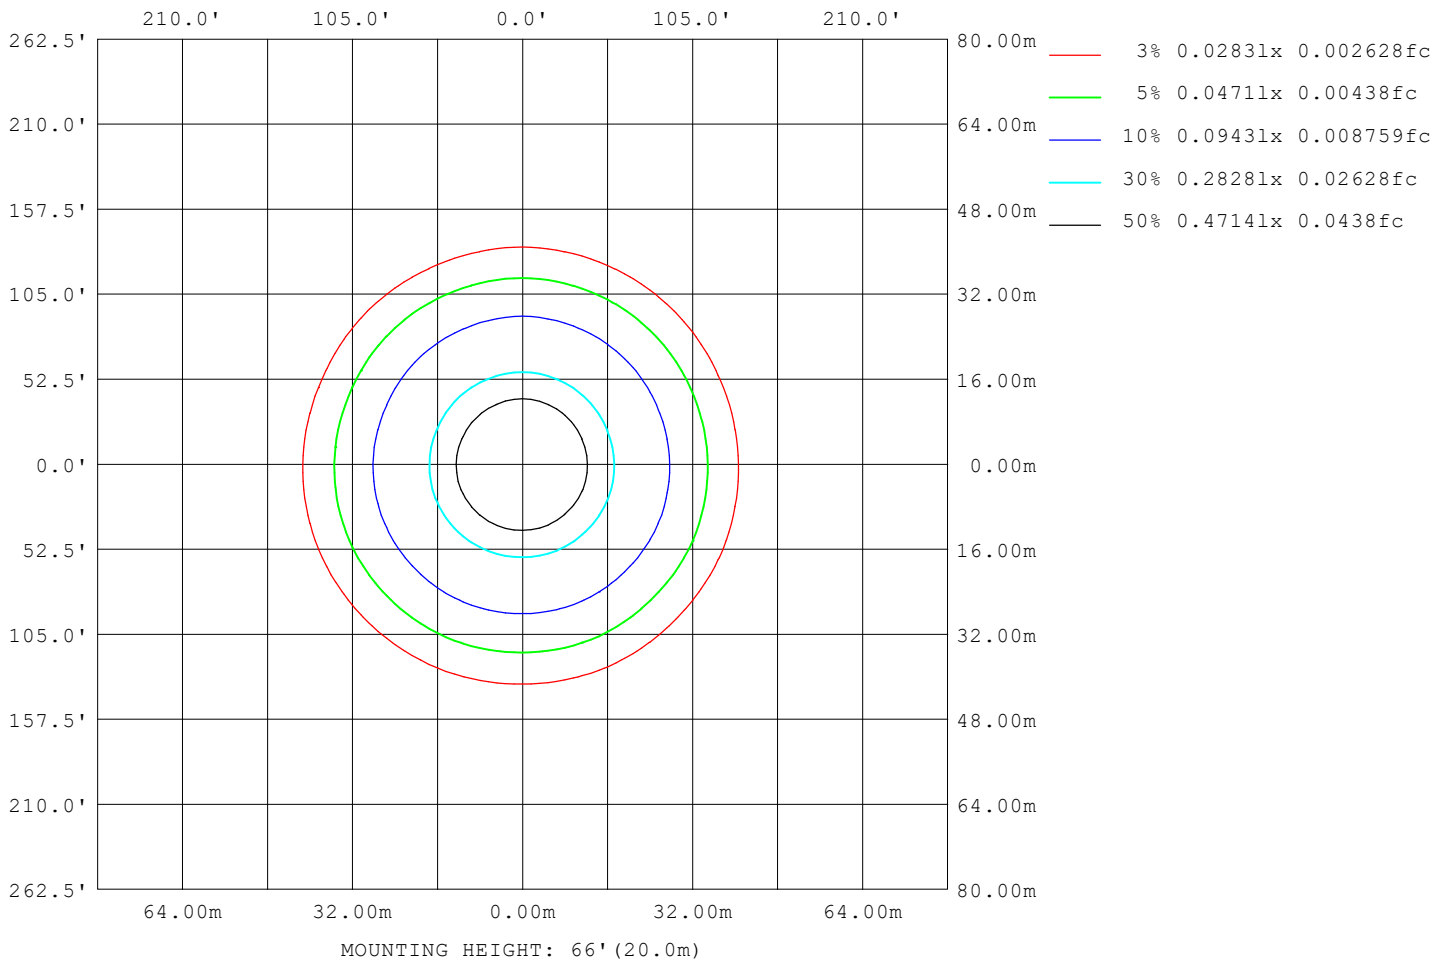

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators:
 Test Date: 2022-12-19

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.090m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:119.75V I:0.1815A P:14.024W PF:0.6453 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1046.05x1 lm		
NAME: FR-LED-6-S15W-5CCTWH	TYPE:	WEIGHT:
SPEC.: 5000K 90	DIM.:	SERIAL No.:
MFR.: LTS	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	2723
L_0~180 (75) av	2434
L_0~180 (85) av	1810
L_90~270 (65) av	2758
L_90~270 (75) av	2429
L_90~270 (85) av	1308
L_45 (65) av	2740
L_45 (75) av	2433
L_45 (85) av	1562

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:
 Test Date:2022-12-19

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

Planar Illuminance Curve

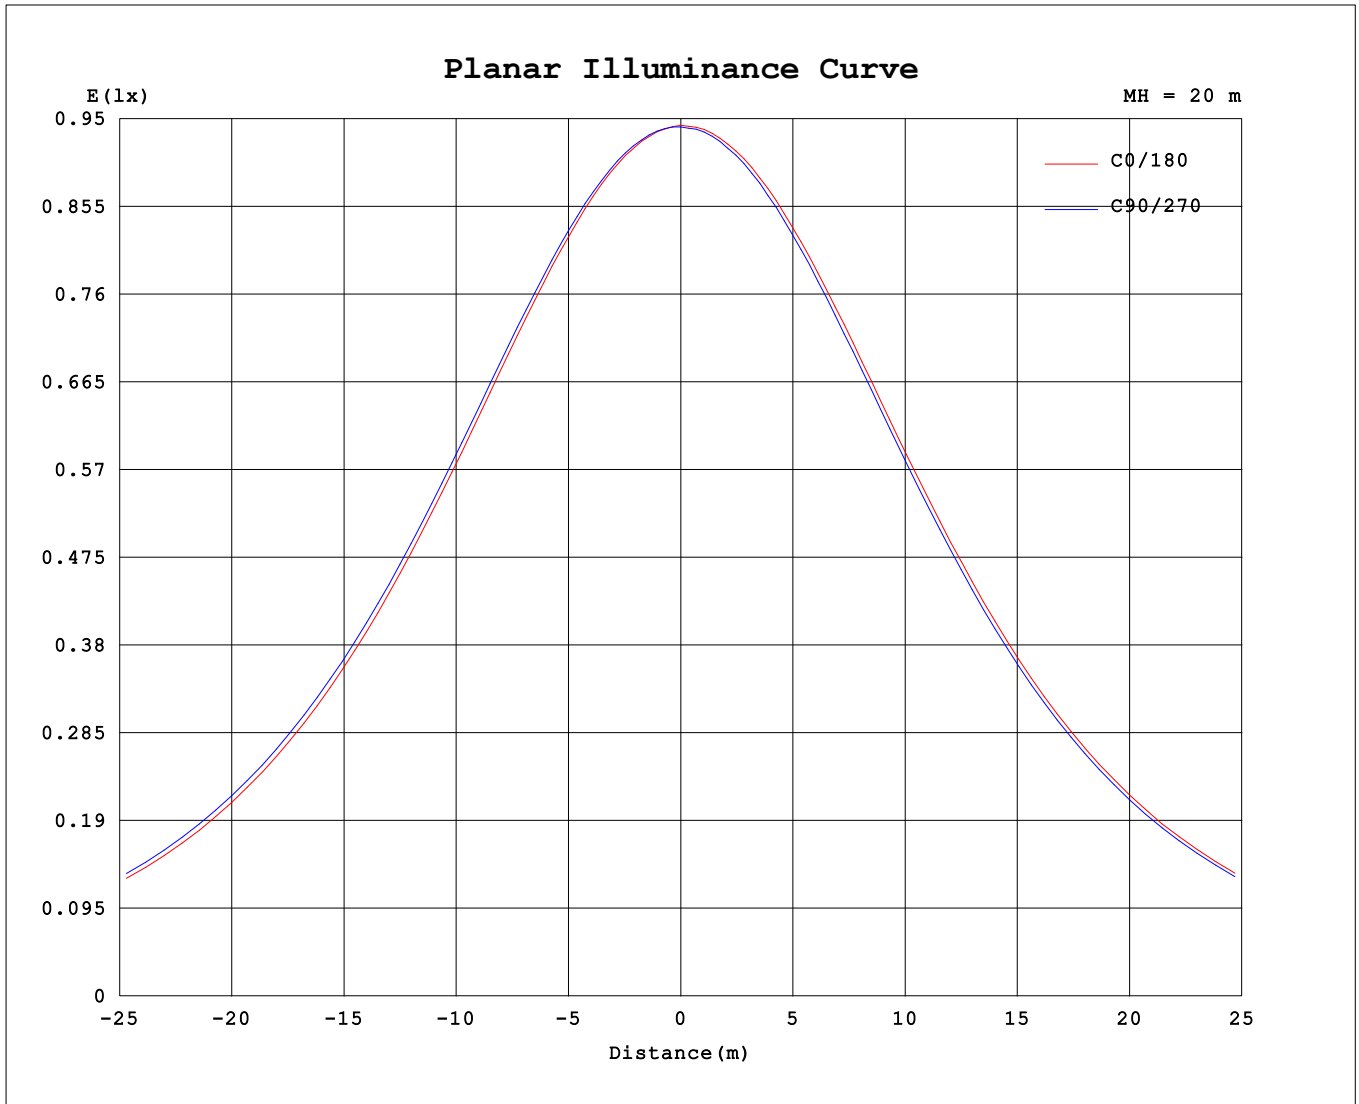

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators:
 Test Date: 2022-12-19

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.090m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.75V I:0.1815A P:14.024W PF:0.6453 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1046.05x1 lm		
NAME: FR-LED-6-S15W-5CCTWH	TYPE:	WEIGHT:
SPEC.: 5000K 90	DIM.:	SERIAL No.:
MFR.: LTS	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	377	377	377	377	377	377	377	377	377	377	377	377	377	377	377	377			
5	374	375	375	375	375	376	376	376	375	375	375	374	375	374	374	374			
10	368	369	369	370	370	371	371	371	370	370	370	369	369	368	367	367			
15	358	359	360	361	362	362	363	363	362	361	360	359	359	358	358	357			
20	344	346	347	349	349	351	351	351	350	348	348	346	346	345	344	343			
25	328	331	331	333	334	335	336	336	335	332	332	330	330	329	328	327			
30	309	312	312	315	315	317	318	318	316	313	313	311	311	309	308	307			
35	287	290	291	294	294	296	297	297	295	292	292	289	290	288	287	285			
40	263	267	267	271	271	273	274	274	272	268	268	266	266	264	262	261			
45	237	241	242	245	246	248	249	249	246	243	243	240	241	238	237	236			
50	210	214	215	219	219	221	222	222	219	215	215	213	214	211	210	208			
55	182	186	186	191	191	193	194	194	191	187	187	184	185	183	182	180			
60	153	157	158	162	162	164	164	165	162	158	158	155	156	154	153	151			
65	124	128	128	132	132	135	135	135	132	128	128	126	127	125	123	122			
70	94.9	98.5	99.2	103	103	105	105	105	102	98.8	98.6	96.5	97.2	95.5	94.1	93.1			
75	66.6	69.5	69.2	71.9	72.3	75.1	76.4	76.2	73.4	69.4	68.6	66.0	67.4	66.6	65.7	64.9			
80	39.8	41.2	39.6	41.6	42.1	45.7	48.1	48.6	45.7	40.9	39.3	36.7	38.2	38.5	39.0	38.6			
85	15.1	14.9	12.8	13.6	14.0	17.7	21.6	23.8	19.9	14.4	12.1	9.74	11.3	12.5	14.0	15.2			
90	0.51	0.47	0.45	0.46	0.45	0.47	0.73	1.83	0.37	0.30	0.29	0.30	0.30	0.33	0.37	0.35			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-12-19

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks: