



LSG3-HO-IT

3" Square Regressed Gimbal LED High Output 11W - Trimless

Project: _____

Location: _____

Model #: _____ Qty: _____

Notes: _____


DESCRIPTION

3" Square Regressed Trimless Gimbal LED
 With Integral Driver In Connection Box
 Gimbal Yet Air-Tight Without Housing Needed

FEATURES & BENEFITS

3 1/2" Deep - Install Where Ceiling Space Is Limited
 Invisible Trim for High-End Contemporary Installations
 Type IC Rated - No Housing Required
 Air-Tight & Wet Location rated
5CCT user selectable 2700-3000-3500-4000-5000K
 or **Dim to Warm** 3000K to 1800K options
 CRI 90+ for True Color Rendering
 Driver Inside Connection Box - No Junction Box Needed
 Push-in / push-out mounting of fixture to trim

DIMENSIONS: ID 4" Round OD 5" Square Cut Out 4" Round
 Ceiling Clearance Required: 4"

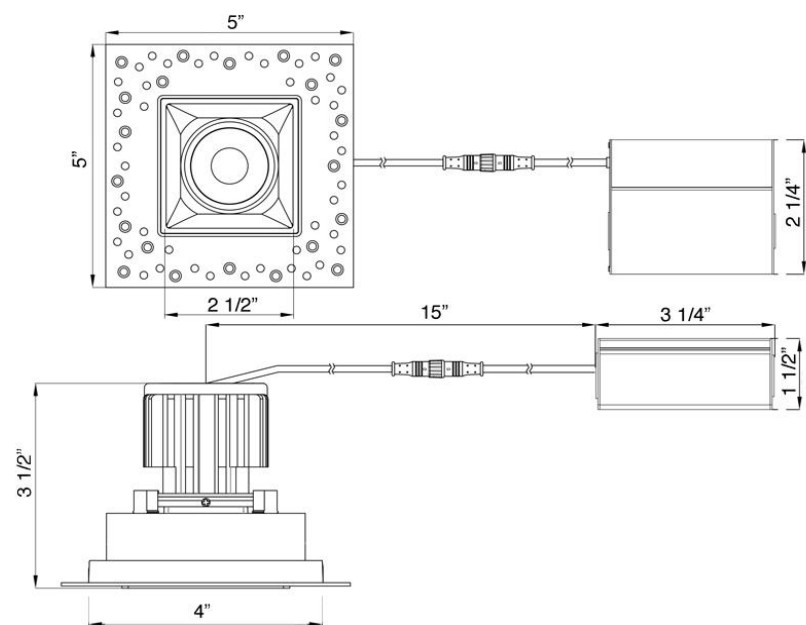

120V TRIAC Dimmable Optional 120V-347V

Driver Included

Driver 0-10V Dimmable
 Order Separately as
[model # LLL-LD1025T3](#)

ORDERING GUIDE

LSG3-5CCT-HO-IT-WH
LSG3-5CCT-HO-IT-BK
LSG3-3018K-HO-IT-WH
LSG3-3018K-HO-IT-BK

[5CCT White Trim](#)
[5CCT Black Trim](#)
[Dim to Warm White Trim](#)
[Dim to Warm Black Trim](#)



SPECIFICATION	
Applications	Sloped Ceilings up to 20°, General Lighting Trimless
Power	11 W
Color Temperature	5CCT: 2700 3000 3500 4000 5000 DTW 30-18K
Light Output	920 950 1020 1050 1050 770
Halogen Equivalent	90 W
Beam Angle	38° Beam with 20° tilt and 360° rotation
CRI	90 +
Default Driver Input	120V AC Triac Dimmable
Optional Driver Input	120V-347V AC 0-10V Dimmable
Junction Box Wire Capacity	Max 5 No 12 AWG or 8 No 14 AWG
Power Factor	0.95
Approved Location	Insulated Ceiling & Wet Locations
IP Rating	IP 54
Air Tight	Yes
Ambient Temperature	-40°F (-40°C) to +104°F (+40°C)
Projected Life	70% Light Output at 50,000 Hours
Certification	cULus
Warranty	10 Year Residential / 5 Year Commercial

AVAILABLE TRIMS



White



Black

ACCESSORIES

Sold Separately



Low Voltage Extension Cables. Max 40 ft Allowed

[6ft - model # EXC6](#)
[20ft - model # EXC20](#)



[26" Long Flat Rough-In Plate model # RIP4](#)



[4 1/8" Hole Flanged with Hanger Bars model # FRP4](#)

Recommended

COMPLIANCE



Type IC
Air-Tight
Wet Location

Lotus LED Lights USA
 250 H Street # 301, Blaine WA 98230 tel 360-200-5500
 Hainesport NJ, Naples FL, Vancouver WA

www.LotusLEDLights.com
 mailing addresses
 warehouses

Lotus LED Lights CANADA
 1080 Cliveden Ave # 6, Delta BC V3M 6G6 tel 604-538-3090
 Delta BC & Mississauga ON