



FR-LED-4-S9W-5CCT-FG

4" Round Fire Rated Floating Gimbal Recessed LED 5CCT 9W

Project: _____

Location: _____

Qty: _____

Notes: _____

DESCRIPTION

4" Round Fire Rated Floating Gimbal Recessed LED

The First Fully Adjustable Fire Rated Lighting Fixture



2 HOUR FIRE RATING
Tested to comply with UL 263, ASTM E119 & CAN ULC S101

FEATURES & BENEFITS

2 Hour Fire Rated without additional housing or hardware

Type IC & Air-Tight Rated - No Housing Required

Heat Resistant Steel Casing provides up to 2 Hour Fire Protection

Heavy Duty Steel Spring Clips for easy installation

1" Spring Height for installations on up to 2 x 5/8" drywall

Plenum Rated Cable for Commercial Installations

1 1/2" Thin - Install in Limited Ceiling Spaces

Driver Inside Connection Box - No Junction Box Needed

5 CCT User Selectable Light Colors


CRI 90+ for True Color Rendering

DIMENSIONS ID 4 1/8" OD 4 7/8" Cut Out 4 1/4"

Fixture Thickness: 1 1/2"

120V Triac Dimmable Driver Included

5CCT switch on the driver

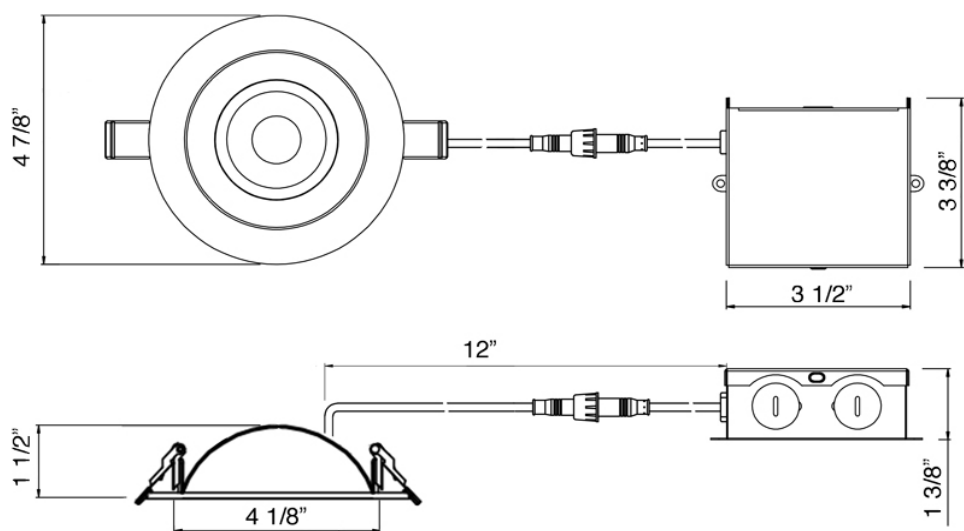

SPECIFICATION	
Applications	Multi-Family Residential, Basements & Commercial
Energy Used	9 W
Color Temperature (K)	2700 - 3000 - 3500 - 4000 - 5000
Light Output (lm)	680 - 720 - 775 - 800 - 800
Halogen Equivalent	75 W
Beam Angle	38°
CRI	90+
Driver Input	120V AC 50/60 Hz
Dimming	TRIAC Dimmers 10% - 100%
Junction Box Volume	9.69 cubic inches / Max 5 No 12 AWG or 8 No 14 AWG
Approved Location	Insulated Ceiling & Damp Locations
Cable	FT6 / CMP Plenum Rated
Air Tight & Type IC	Yes
Ambient Temperature	-4°F (-20°C) to +104°F (+40°C)
Projected Life	70% Light Output at 50,000 Hours
Certification	cETLus
Fire Rating	UL 263-2011(R2022), STM E119-20 & CAN/ULC-S101-14
Warranty	3 Year



ACCESSORIES

Sold Separately



[Flanged Plate with Hanger Bars model # FRP4](#)



[26" Flat Rough-In Plates model # RIP412](#)



[13" Mounting Plate Flanged model # MP4](#)



[13" Mounting Plate Flat model # MP4-2](#)



[Jumper Cable 10 ft. 5 CCT Model # FR-JC-5CCT-10](#)



[Goof Ring White OD 5 3/4" model # GR4](#)

ORDERING GUIDE

	CCT	Trim
FR-LED-4-S9W-5CCT-FG-WH	5CCT	White

5CCT: 2700 - 3000 - 3500 - 4000 - 5000K



Stock trim - White. Other Trim Colors Available By Custom Order

Lotus LED Lights USA

250 H Street # 301, Blaine WA 98230 tel 360-200-5500

Hainesport NJ, Naples FL, Vancouver WA

www.LotusLEDLights.com

mailing addresses

warehouses

Lotus LED Lights CANADA

702 Chester Rd, Delta BC V3M 6J1 tel 604-538-3090

Delta BC, Mississauga ON